

IEC Pin and Sleeve

60A, 3 PhaseY 120/208V, 4 Pole, 5 Wire

Watertight Plug

Features

- Solid one-piece pins for reliable electrical contact
- Gasketed sealing ring provides watertight seal
- Heavy duty external cord grips

Ordering Information

Description	Device Color	UPC	Catalog Number
60A, 3Ø 120/208V Pin and Sleeve plug (male).	Blue	783585405704	HBL560P9W

Standards

UL Listed, File E146032
CSA Standard C22.2 No. 182.1
UL Classified to IEC60309-1

Specifications

Housing	Zytel® ST801 Nylon
Locking Ring	Reinforced Thermoplastic Polyester
Contact Carrier	High-Impact Thermoset
Terminal Screws	Stainless Steel
Retainer	High-Impact Thermoset

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current

Dielectric Voltage	Withstands 3,000V AC Min
Max. Working Voltage	600V AC RMS


Mechanical	
Impact Resistance	Per CSA C22.2 No. 182.1 / UL1682
Product Identification	Identification and ratings are a permanent part of the device housing.
Terminal Identification	Terminals identified in accordance with North American and IEC conventions

Environmental	
Flammability	HB or Better per UL 94 or CSA C22.2 No. 0.17
Ingress Protection	IP67 Suitability
Moisture Resistance	Watertight per IEC 60309-1
Operating Temperature	Maximum Continuous 75°C; Minimum - 40°C w/o impact

Online Resources

eCatalog

HUBBELL

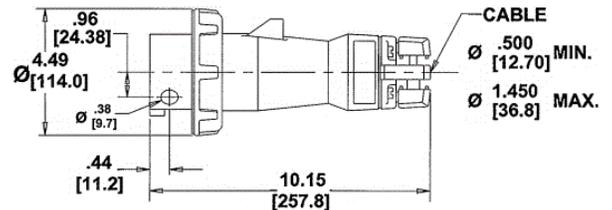

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

