


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE		COLOR	DIMENSIONS in. [mm]			TOOL CHART		
		ENGLISH AWG	METRIC mm <sup>2</sup>		MAX. WIRE INSULATION DIAMETER	L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	PRESS	
									CP-871, UC200, UC100	CP-871, UC200
									**APPLICATORS	
							CA9	CA-800EZ		
							DIES			
							CD9-1A	CD-800-1		
							CD9-2A	CD-800-2		
							CD9-3B	CD-800-3		
DV18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.15 [3,8]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD9-1A	CD-800-1
DV18-205B	.205/.187 X .032 [5,2/4,8 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV18-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV18-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV18-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
DV14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.17 [4,3]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD9-2A	CD-800-2
DV14-205B	.205 X .032 [5,2 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV14-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV14-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV14-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
*DV10-250	.250 X .032 [6,3 X 0,8]	12-10	4,0-6,0	YELLOW	.23 [5,8]	.95 [24,1]	.29 [7,4]	.12 [3,0]	CD9-3B	CD-800-3

\*NOT UL LISTED OR CSA CERTIFIED  
 \*\*APPLICATOR FOOTPRINT MAY BE COMPATIBLE WITH OTHER COMMON PRESSES OR WIRE PROCESSING MACHINES

NOTES:

- USED FOR:
  - A. STRANDED COPPER WIRE ONLY
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600V. MAX. BLDG WIRE
  - D. 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
  - A. STAMPING: CDA 260 BRASS, TIN PLATED
  - B. HOUSING: VINYL
- WIRE STRIP LENGTH:
  - 9/32 <sup>+1/32</sup> [7,1 <sup>+0,8</sup> ]
  - 11/32 <sup>+1/32</sup> [8,7 <sup>+0,8</sup> ] FOR DV10-250
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- THE DV10-250 IS CONSTRUCTED WITH BRASS SLEEVE IN THE WIRE CRIMP AREA

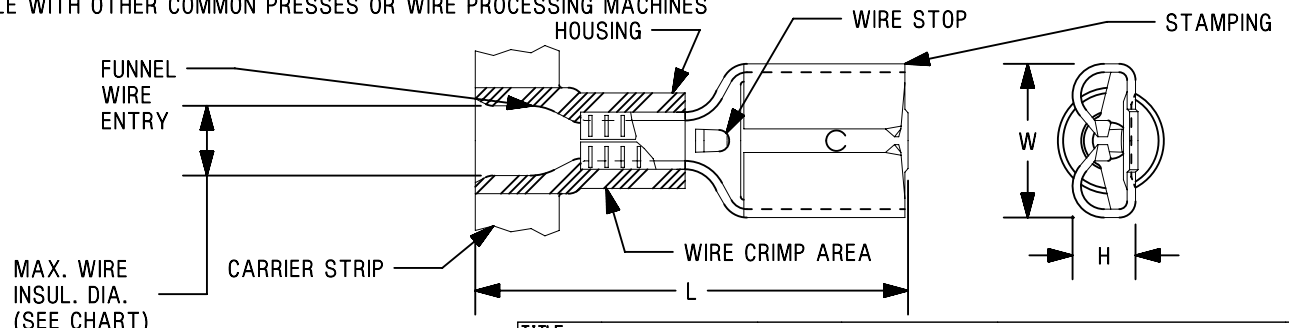

TITLE		FEMALE DISCONNECTS, VINYL INSULATED	
CUSTOMER DRAWING			
ITEM REVISION NAME	N41169BA/12	<b>PANDUIT</b>	
DATASET FILE NAME	N41169BA_DC/12A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ]		SEE NOTES	
.xx ± .01 [ .25 ]      ANGLES ± 5 °		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		A41169	
DRAWN BY	DATE	CHK	SCALE
DSM	-	LA	N.T.S.
SHT 1 OF 1		SIZE	
		A	

12	2.2.21	JHNU	JADE	JADE	REMOVED CP-861, CP-862 ADDED UC100, UC200 FORMATTED TOOL CHART	098711
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

D10100DA/15