

Twist-Lock® Devices
30A, 250V AC, 2 Pole, 3 Wire Grounding
Valise® Connector

HUBBELL

Features

- Powerful cord grips prevent conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow nylon.	.590"-.930" (15.0-23.6)	783585236049	HBL2623VY

Listings


Listed to UL 498
Fed.Spec. W-C-596
Certified to CSA C22.2 No.42

Specifications

Housing	Yellow nylon
Blades	Brass
Terminal Screws	#8 - 32 Steel (Philips / Slotted / Robertson)
Terminal Clamps	Steel - Nickel plated
Clamp Screws	#8 - 32 Steel - Zinc plated (Philips / Slotted / Robertson)

Performance

Electrical	
Current Interrupting	Certified for full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#14 AWG- #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperature	Maximum continuous 75°C, minimum -40°C (w/o impact)

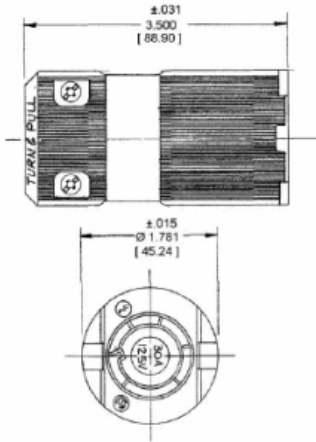

Accessories

Plug	HBL2623VY
Weatherproof Boot	HBL60CM32V
Flanged Inlet	HBL2626
Weatherproof Boot	HBL60CM31V

Resources

Customer Use Drawing
eCatalog

