

NetKey® Category 6A Punchdown Patch Panels

SPECIFICATIONS

Category 6A/Class E_A punchdown patch panels shall terminate unshielded twisted 4-pair, 22 – 26 AWG, 100 ohm cable and mount to standard EIA 19 inches or 23 inches racks. Punchdown tool shall properly terminate each conductor for optimum performance. Universal T568A and T568B color-coded wiring schemes included.



TECHNICAL INFORMATION

Category 6A/Class E_A performance:	Exceeds ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E _A channel requirements at swept frequencies up to 500 MHz Exceeds ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E _A component requirements at swept frequencies up to 500 MHz
FCC and ANSI compliance:	Meets ANSI/TIA-1096-A; contacts plated with 50 microinches of gold for superior performance
IEC compliance:	Meets IEC 60603-7 and IEC 60512-99-002
PoE and PoH compliance:	Meets IEEE 802.3af/802.3at and 802.3bt type 3 and type 4 Supports Power over HDBaseT up to 100 watts
c(UL)us Listed:	UL 1863 (Use as communications circuit accessory); CSA standard C22.2
RoHS compliance:	Compliant
Mounting options:	Mounts to standard EIA 19" or 23" racks (23" requires use of extender brackets: PEB1 or PEB2)

KEY FEATURES AND BENEFITS

100% Performance tested:	Confidence that each port delivers specified performance
110 style punchdown termination:	Utilizes industry standard termination style and includes wire retention cap
Identification:	Write-on areas allow for port and panel identification
Industry standard RJ45 interface:	Familiar to end-users; backwards compatible with Category 6

APPLICATIONS

NetKey Category 6A Punchdown Patch Panels provide a cost effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The NetKey Solution helps organizations efficiently and reliably meet data transmission needs. With certified performance to ISO 11801 Class E_A and ANSI/TIA-568.2-D Category 6A component standards, this system will support high bandwidth applications such as those required by education, healthcare, finance, and banking.

NetKey Category 6A Flat Punchdown Patch Panels

24-port, 1 RU:	NK6XPPG24Y
48-port, 2 RU:	NK6XPPG48Y


Termination Tools

Punchdown tool:	PDT110‡
Snipping tool:	CWST
Stripping tool:	CJAST
Replacement retention cap:	DRWCIW-24

‡Terminates the NetKey Keystone Punchdown Jack Module and NetKey Punchdown Patch Panels
-24 indicates 24 pieces per bulk pack to reduce single use plastic

NetKey® Category 6A Punchdown Patch Panels

ENGINEERING DRAWINGS

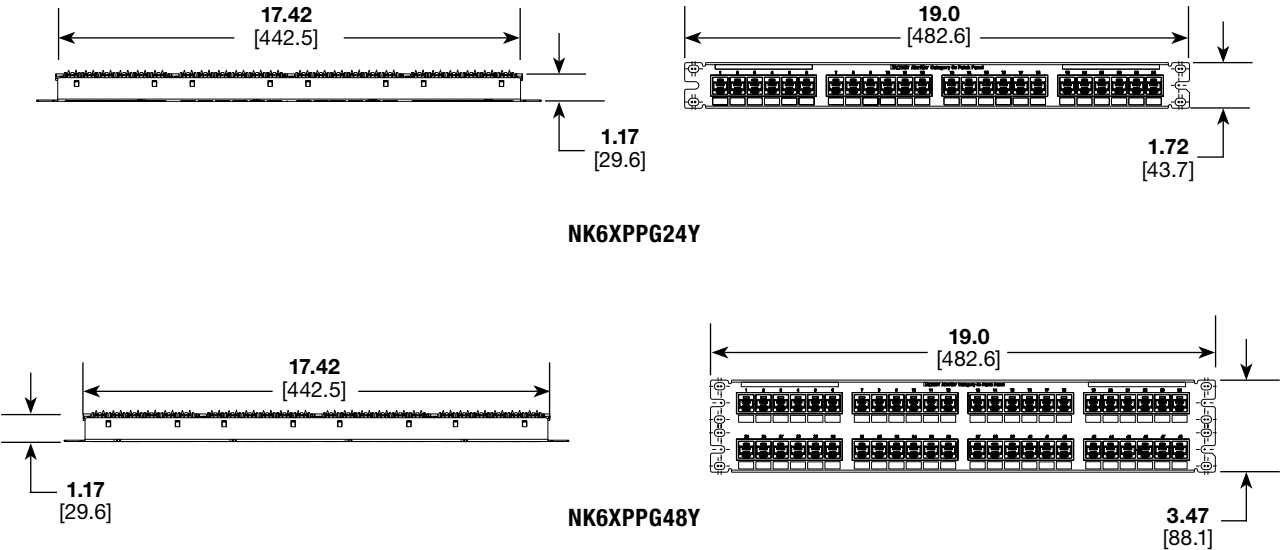

Dimensions are in inches. [Dimensions in brackets are metric].

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300	PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200	PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575	PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000	PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000	PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020
--	---	---	--	--	---

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2024 Panduit Corp.
ALL RIGHTS RESERVED.
COSP605-WW-ENG
7/2024