

IEC Pin and Sleeve
100A, 3 PhaseY 120/208V, 4 Pole, 5 Wire
Low Profile Pin and Sleeve Plug



- Features
- Solid one-piece pins for reliable electrical contact
 - Integrated Cord Grip limits strain on terminals

Ordering Information

Description	UPC	Catalog Number
Low Profile Pin and Sleeve Plug, IEC	783585392875	A5100P9
Device Color		
Blue		




Specifications

Case	Zytel® 101 Nylon
Shroud	Zytel® 101 Nylon
Pins	Brass CDA #360
Pin and Carrier	High-Impact Thermoset
Terminal Screws	Stainless Steel

Performance

Electrical	
Current Interrupting	Certified for current interruption at full rated current
Dielectric Voltage	Withstands 3,000V AC
Max Working Voltage	250V RMS
Mechanical	
Impact Resistance	Per CSA C22.2 No. 182.1 / UL1682
Product Identification	Ratings are a permanent part of the device housing
Terminal Identification	Terminals identified in accordance with North American convention
Environmental	
Flammability	HB or better per UL 94 or CSA C22.2 No. 0.17
Ingress Protection	IP22 Suitability
Operating Temperatures	Max. Continuous +75°C; Min. -40°C w/o impact

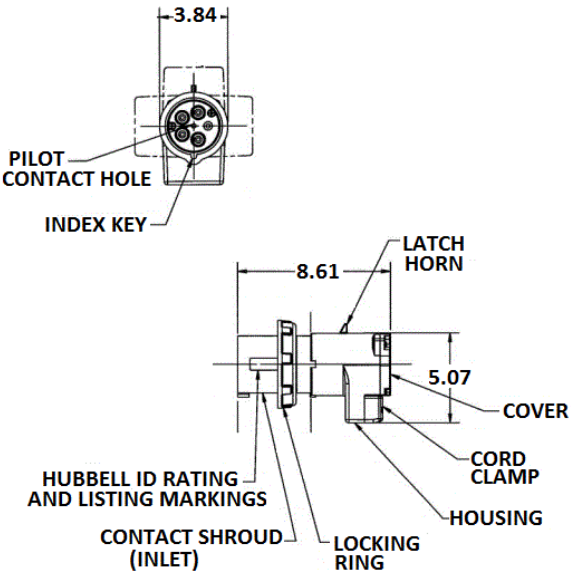

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

