

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal where high brightness and good illumination levels are required such as retail, light industrial and warehouses.

ATTRIBUTES

Fixture can be assembled with snap together components and requires no tools. Available in one lamp or two lamp configuration.

CONSTRUCTION

Heavy-duty channel, die-formed from Code-gauge steel.

Sturdy channel cover secured by captive quarter-turn latch for easy access to wireway.

Combination endplate/channel connector furnished with each fixture.

FINISH

Five-stage iron phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts finished with high-gloss, baked white enamel.

ELECTRICAL SYSTEM

MVOLT ballasts are electronic, full light output-reduced energy. Less than 10% THD. Multi-volt operation, 120-277V.

120V ballasts are thermally protected, resetting, Class P, LPF, non-PCB, UL Listed, CSA Certified.

Rapid-start ballasts are sound rated A.

INSTALLATION

For unit or row installations, surface or suspended mounting.

LISTING

UL listed to US and Canadian safety standards. For use in damp locations. Optional: Mexico NOM.

WARRANTY

1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

Contractor Select

Strip Lights



| C Specifications | Z1 Specifications | Z2 Specifications | S Specifications |
|---------------------|--------------------|--------------------|--------------------|
| Length: 24 (61.0) | Length: 24 (61.0) | Length: 24 (61.0) | Length: 18 (45.7) |
| 36 (91.4) | 36 (91.4) | 36 (91.4) | 24 (61.0) |
| 48 (122.0) | 48 (122.0) | 48 (122.0) | 36 (91.4) |
| 72 (182.9) | 96 (243.9) | 96 (243.9) | 48 (122.0) |
| 96 (243.9) | Width: 2-1/4 (5.7) | Width: 2-1/4 (5.7) | Width: 2-3/4 (6.9) |
| Width: 4-3/8 (11.1) | Depth: 1-1/4 (3.1) | Depth: 1-1/4 (3.1) | Depth: 1-3/4 (4.4) |
| Depth: 2-1/8 (5.4) | | | |

All dimensions are inches (centimeters).

ORDERING INFORMATION

| Catalog Number | UPC | Description | # of Lamps | Length | Wattage | Voltage | Ballast Type | Lamp Included | Pallet Qty. | Standard Carton Qty. |
|----------------|--------------|------------------------------|------------|--------|---------|---------|---------------------------|---------------|-------------|----------------------|
| C232 MV | 745975079711 | T8 general-purpose strip | 2 | 48" | 32 | 120-277 | Electronic, instant start | N | 99 | 1 |
| TC232 MV | 745975080809 | T8 general-purpose strip | 4 | 96" | 32 | 120-277 | Electronic, instant start | N | 99 | 1 |
| C225 MV | 745975081219 | T8 general-purpose strip | 2 | 36" | 25 | 120-277 | Electronic, instant start | N | 99 | 1 |
| C217 MV | 745975081493 | T8 general-purpose strip | 2 | 24" | 17 | 120-277 | Electronic, instant start | N | 198 | 1 |
| C296 | 745973789766 | T12 general-purpose strip | 2 | 96" | 75 | 120 | Electronic, rapid start | N | 99 | 1 |
| C296T8 MV | 745977076145 | T8 general-purpose strip | 2 | 96" | 75 | 120-277 | Electronic, instant start | N | 99 | 1 |
| Z117 MV | 745976682675 | T8 low-profile strip | 1 | 24" | 17 | 120-277 | Electronic, instant start | N | 448 | 1 |
| Z125 MV | 745976682705 | T8 low-profile strip | 1 | 36" | 25 | 120-277 | Electronic, instant start | N | 224 | 1 |
| Z132 MV | 745976682736 | T8 low-profile strip | 1 | 48" | 32 | 120-277 | Electronic, instant start | N | 224 | 1 |
| TZ132 MV | 745976682767 | Tandem, T8 low-profile strip | 2 | 96" | 32 | 120-277 | Electronic, instant start | N | 224 | 1 |
| Z217 MV | 745976682781 | T8 low-profile strip | 2 | 24" | 17 | 120-277 | Electronic, instant start | N | 448 | 1 |
| Z225 MV | 745976682927 | T8 low-profile strip | 2 | 36" | 25 | 120-277 | Electronic, instant start | N | 224 | 1 |
| Z232 MV | 745976682941 | T8 low-profile strip | 2 | 48" | 32 | 120-277 | Electronic, instant start | N | 224 | 1 |
| TZ232 MV | 745976682989 | Tandem, T8 low-profile strip | 4 | 96" | 32 | 120-277 | Electronic, instant start | N | 224 | 1 |


Strip Lights

DIMENSIONS


Inches (centimeters). Subject to change without notice.

Z STRIPS

T8 DIMENSIONS

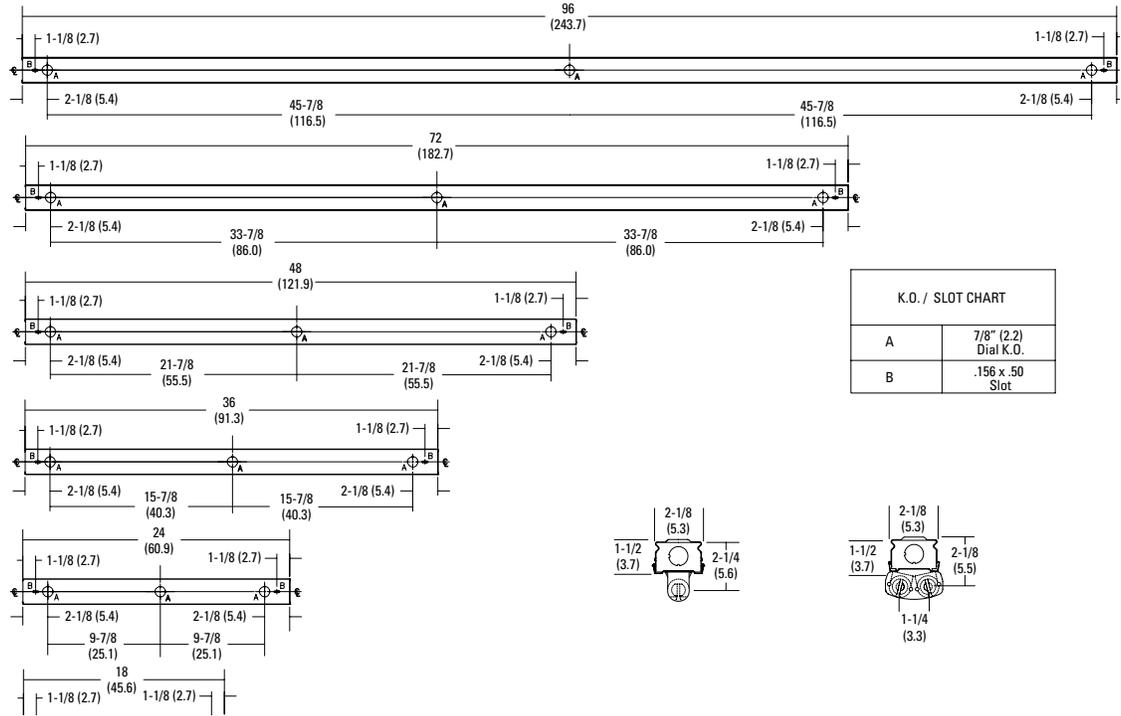

T5 DIMENSIONS

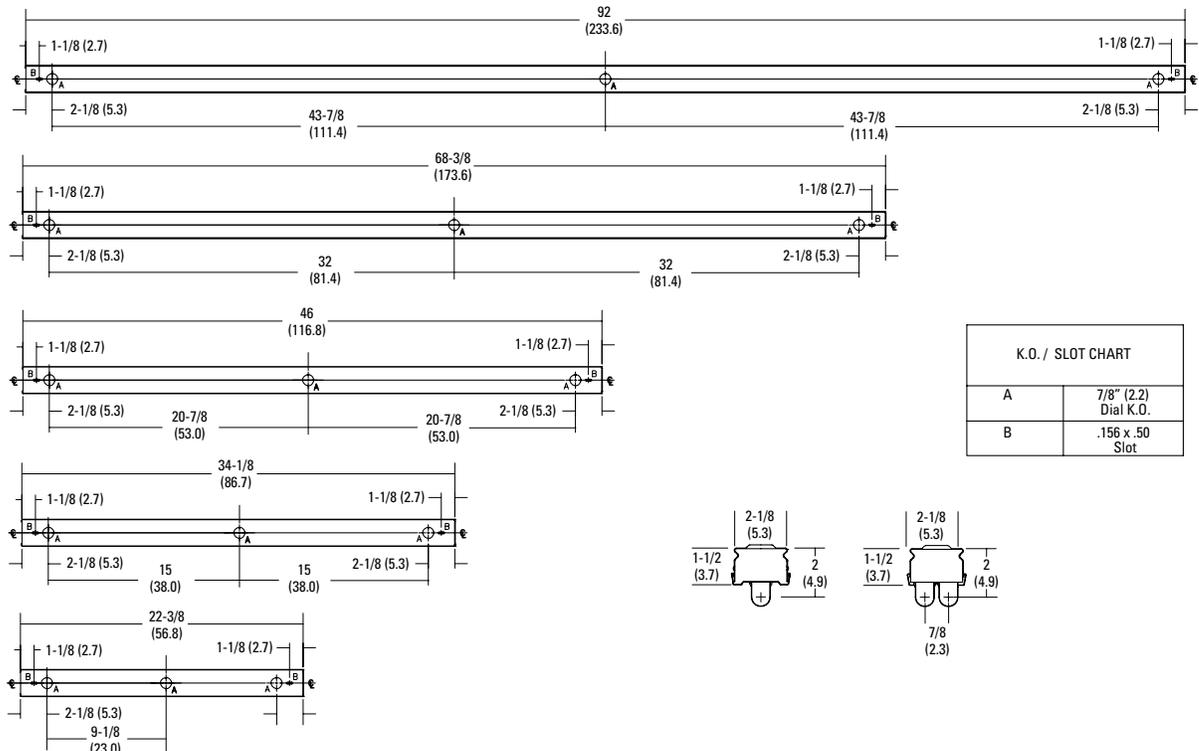


Strip Lights

DIMENSIONS (continued)

Inches (centimeters). Subject to change without notice.

C STRIPS

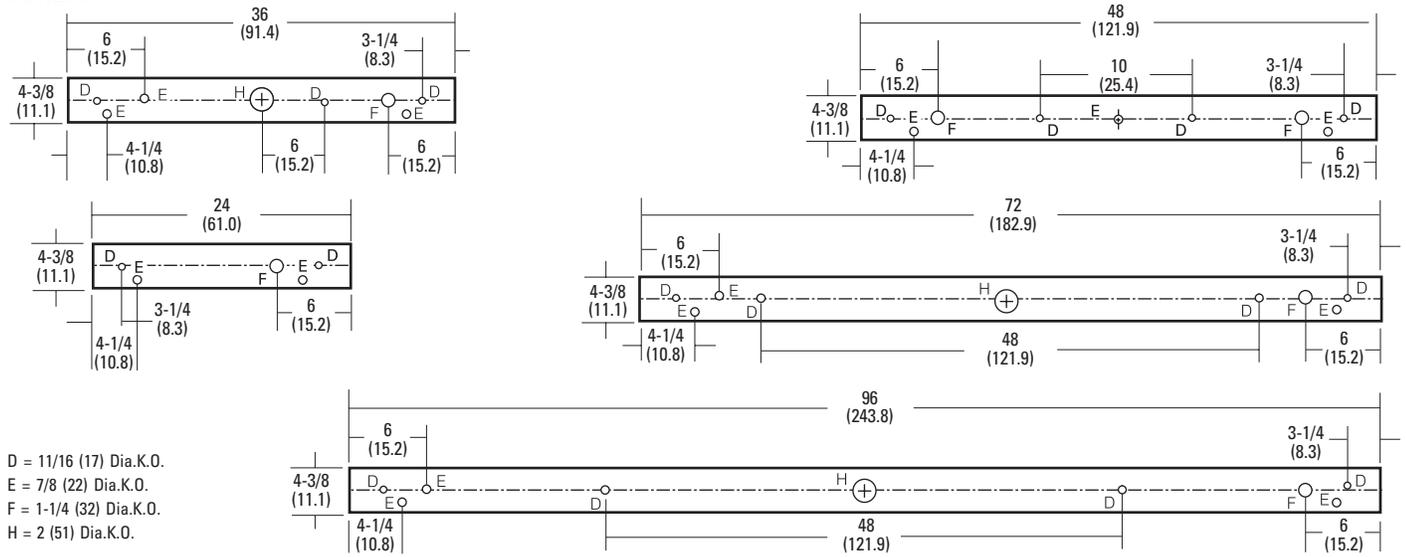

PHOTOMETRICS

See www.acuitybrands.com.