

IndustrialNet™ TX6A™ Patch Cords

SPECIFICATIONS

Industrial Ethernet patch cords shall be Category 6A, industrial grade, stranded, twisted pair cable for UTP and STP installations. Each patch cord shall be pre-terminated to include Category 6A industrial plugs on each end, wired according to the T568B standard. Patch cords shall include industrial-rated IP65/IP67 bulkhead connectors on both ends or an industrial-rated IP65/IP67 bulkhead connector on one end with an IP20-rated RJ45 connector on the other. Tethered caps shall be available on the bulkhead connectors to protect connectivity in un-mated conditions. It shall achieve an IP65/IP67 rating when mated with an IP65/IP67 and NEMA UL Type 12 industrial grade, bayonet style connector.



TECHNICAL INFORMATION

Category 6/Class E_A channel and component performance:	Exceeds channel and component requirements for ANSI/TIA-68-C.2 Category 6A and ISO11801 Class EA Standards at swept frequencies 1 - 500 MHz
IP compliance:	Bulkhead connection rated IP65/IP67 for dust protection and temporary liquid immersion
IEC compliance:	Patch cords meets IEC 60603-7; housing meets IEC 61076-3-106; Variant 1, conforms to ODVA mechanical specifications
FCC and ANSI/TIA compliance:	Meets ANSI/TIA-1096-A; contacts plated with 50 microinches of gold for superior performance
PoE compliance:	Meets IEEE 802.3af and IEEE 802.3at for PoE applications
NEMA/UL compliance:	Bulkhead connection rated UL Type 12 to provide protection against circulating dust, falling dirt, and dripping noncorrosive liquids
RoHS compliance:	Compliant
Environmental protection:	Industrial bulkhead connection protects and seals connections against dust and water immersion to ANSI/IEC 60529-2004; vibration, temperature, and chemical resistant; shielded version further enhances electromagnetic performance
Materials:	Constructed of 24 AWG STP stranded industrial grade cable, using UTP or STP IndustrialNet TX6A Modular Plugs and IP65/IP67 housings for UTP or STP patch cords respectively
Temperature rating:	-4°F to 158°F (-20°C to 70°C) during operation

KEY FEATURES AND BENEFITS

100% Performance tested:	Provides confidence that each patch cord delivers Category 6A performance at the component level.
IP/NEMA/UL rated connection:	Withstands light wash down and temporary submerged conditions in harsh factory environments without loss of performance when mated to IP65/IP67 IndustrialNet Connectors.
Bayonet style interface:	Provides quick installation for lowest installed cost.
Mated bayonet tactile lock:	Ensures positive mating between the plug and connector; rated to 100 mating cycles enabling moves, adds and changes for future upgrades.
Robust construction:	Includes plug contact plated with 50 microinches of gold to support reliable error-free data transmission.
Caps available for both receptacle and plug:	Protect disengaged connectivity from environmental harm preserving connection integrity when plug is mated later to the jack.

Continue to next page

IndustrialNet TX6A Patch Cords

UTP with bulkhead connector on both ends:	IUTP6X*MBL
UTP with bulkhead connector on one end:	IUTP6X1MBLR
STP with bulkhead connector on both ends:	ISTP6X*MBL
STP with bulkhead connector on one end:	ISTP6X*MBLR

IndustrialNet TX6A Connectors

Unshielded:	IAEBH6X
Shielded:	IAEBH6XS
Coupler Shielded:	IAEBHC6XS

IndustrialNet Stainless Steel Faceplates

Single gang:	IAEFP1
Double gang:	IAEFP2-2G

*Meter lengths: 1, 2, 3, 5, or 10



All Part Numbers Compliant with the U.S. Trade Agreements Act (TAA) for purchases shipped to the United States.


IndustrialNet™ TX6A™ Patch Cords

APPLICATIONS


IndustrialNet TX6A Patch Cords provide an ideal solution to support industrial Ethernet from the Local Area Network (LAN) based support offices to the processing devices on the plant floor even under harsh industrial conditions. Innovative design features provide a secure, reliable connection for superior data transmission in work cells where moisture and dust/particles are encountered, in temperature extremes and in applications with vibration. Industrial bulkhead connection protects and seals against dust and water immersion common in the food and beverage industry where bacterial contamination is present and light wash down is required. High temperature resilience of up to 85°C storage and 70°C operating offers reliable connection in manufacturing facilities such as metal processing, welding, and chemical batch processing where high temperatures are normal. In automotive panel stamping plants and work cells where vibration is a concern, the IndustrialNet TX6A Patch Cords protect the RJ45 mating.

ENGINEERING DRAWINGS

IP67-IP67 with Caps

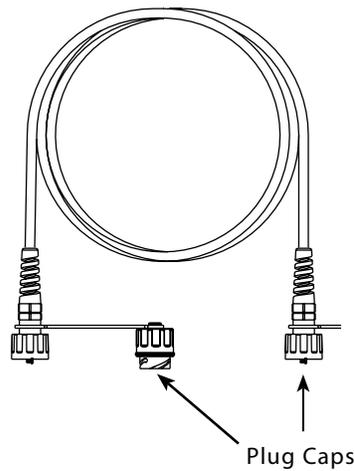

IP67 with Cap – IP20 without Cap

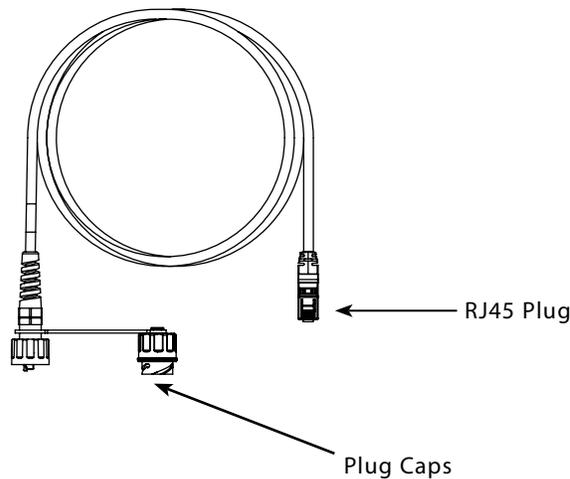

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
COSP400-WW-ENG
10/2023