THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:
1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6) C-19, METERED
230V / 16A / SINGLE-PHASE

PART NO.	COLOR
VB1D2A0BA30P1	BLACK

2. ACCESSORY COMPONENTS:
(4) M6 x 20mm MOUNTING SCREWS
(4) #12-24 x 1/2" MOUNTING SCREWS
(2) #10-32 LOCKING COLLAR SCREWS
(2) L-BRACKETS

3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).

4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).

5. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, GOST, AND IS CE MARKED.


6. RoHS COMPLIANT.


7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.

8. MAXIMUM AVAILABLE INPUT POWER = 3.7 KW


9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.

PANDUIT P/N	WEIGHT
VB1D2A0BA30P1	14.1 lb (6.4 kg)

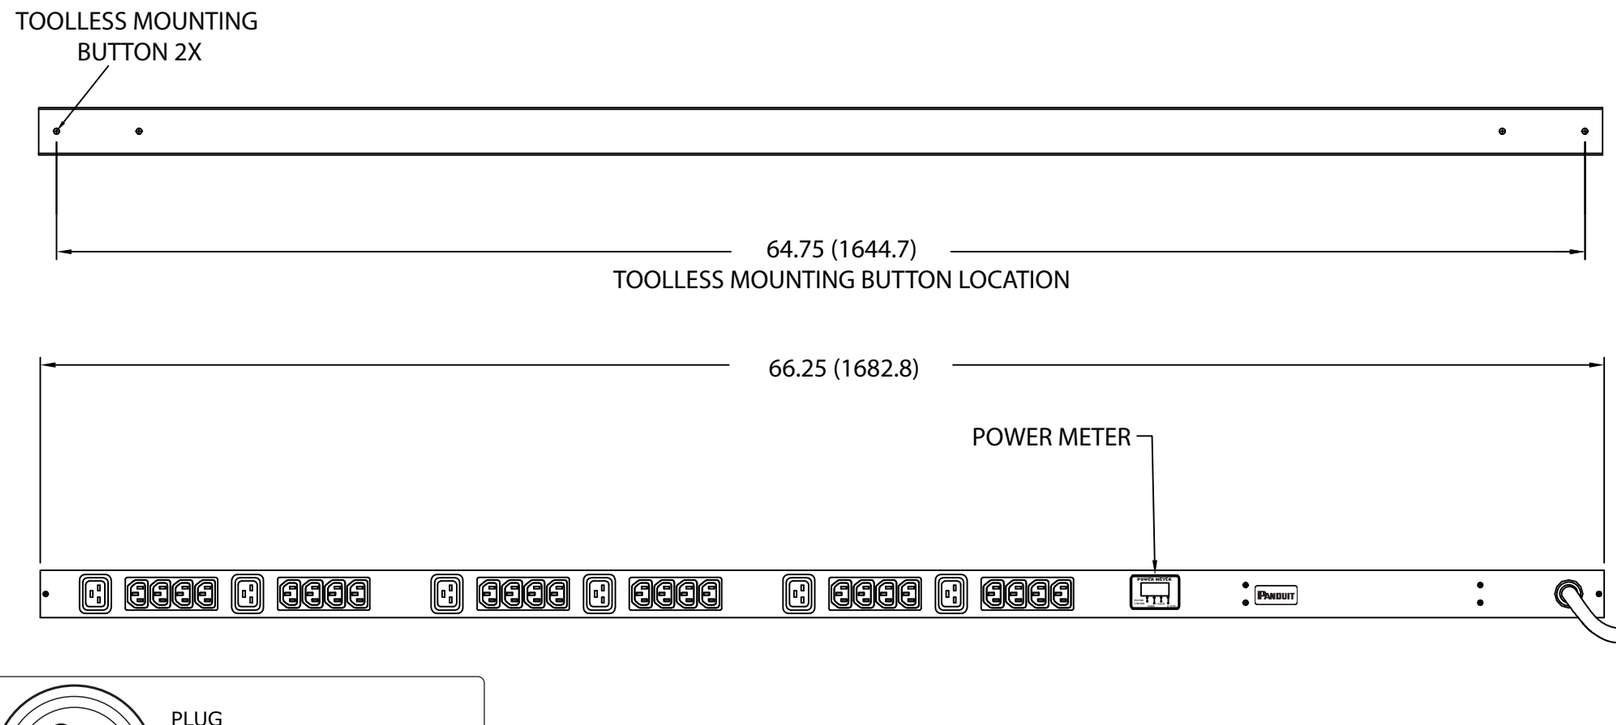




PLUG
16 AMP, 250V, SINGLE-PHASE
2P/3W
IEC 60309, SPLASHPROOF



TWENTY-FOUR (24)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13



SIX (6)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01A	8-30-12	PIP	MRWA	A. UPDATED NOTE #8. B. ADDED NOTE #9.	09V098NK			
00A	2-10-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098NK			

MODEL FILENAME: 09V098NK/01.PRT
CAD FILENAME/LAYERS: 09V098NK_DC/01A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, MIXED (24) C-13 & (6) C-19, METERED
POWER OUTLET UNIT
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
INCHES: X.X +/- 0.03, X.XX +/- 0.015, X.XXX +/- 0.005
[METRIC - MILLIMETER]: X. +/- 0.8, X.X +/- 0.4, X.XX +/- 0.13
ANGLE +/- 1°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MAV
MAT'L:
SCALE: NONE
DATE: 2-10-11
DRAWING NO.: 09V098NK
DWG: B SIZE
CHK'D: KRKE