
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
VB1D2B4CM48M1	24 lb (10.9 kg)

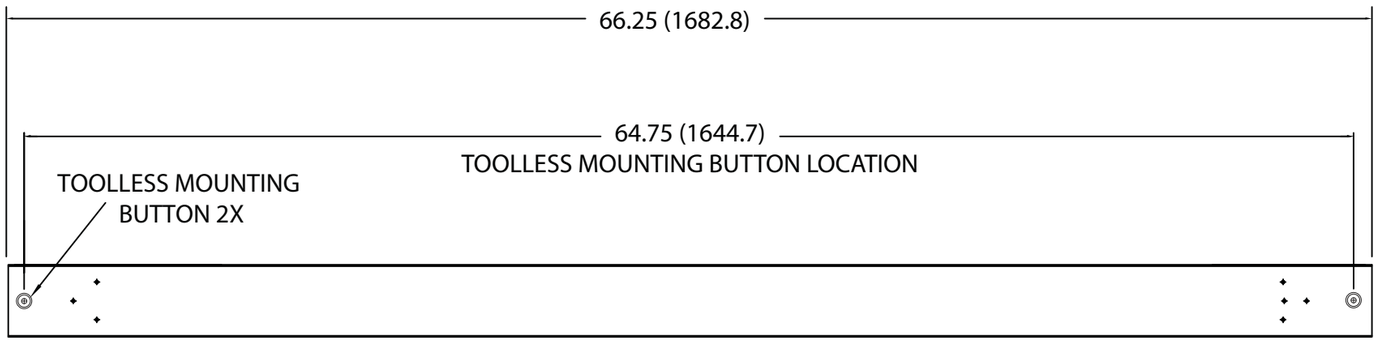



NOTES:

1. IDENTIFICATION: VERTICAL, (48) C-13, METERED
   230V / 32A / SINGLE-PHASE POU

PART NO.	COLOR
VB1D2B4CM48M1	BLACK


2. ACCESSORY COMPONENTS:
   (4) M6 x 20mm MOUNTING SCREWS
   (4) 12-24 x 1/2" MOUNTING SCREWS
   (2) #10-32 LOCKING COLLAR SCREWS
   (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).
5. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, GOST AND IS CE & C-TICK MARKED.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE INPUT POWER = 7.4 KW
9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

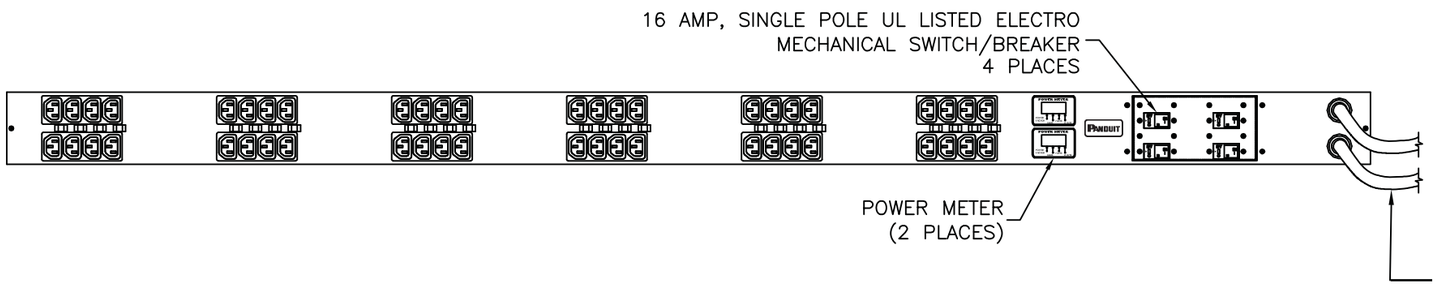

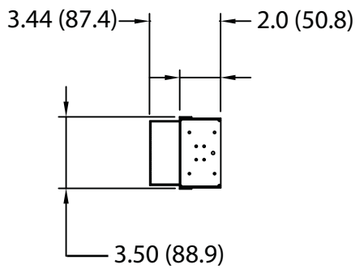



PLUG (2)
32 AMP, 250V, SINGLE-PHASE
2P/3W
IEC 60309, SPLASHPROOF



FOURTY-EIGHT (48)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
01A	8-15-12	PIP	MRWA	C. ADDED BUTTON MOUNTING NOTE.	09V098GW			
00B	10-19-11	MRWA	KRKE	A. UPDATED NOTES 5 & 8 B. ADDED NOTE 9	09V098GW			
00A	2-10-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098GW			

MODEL FILENAME: 09V098GW/01.PRT
CAD FILENAME/LAYERS: 09V098GW_DC/01A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, (48) C-19, METERED
POWER OUTLET UNIT
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
INCHES: X.X +/- 0.03, X.XX +/- 0.015, X.XXX +/- 0.005
[METRIC - MILLIMETER]: X. +/- 0.8, X.X +/- 0.4, X.XX +/- 0.13
ANGLE +/- 1°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MAV
DATE: 2-10-11
CHK'D: KRKE
MAT'L:
SCALE: NONE
DRAWING NO.: 09V098GW
DWG SIZE: B