



Communication module PROFIBUS for SIRIUS soft starter 3RW44 Required firmware version 3RW44 >= *E06*. implemented for starters 3RW44 from delivery date May 2006

product brand name	SIRIUS
product category	Communication modules
product designation	Communication module
design of the product	for 3RW44 soft starter integration in the PROFIBUS network with DPV1 slave functionality. From module firmware version E04 and higher (and/or date of manufacture May 1, 2009 or later), DPV1 operation of the soft starter on a Y-link is also possible (only DPV0 operation possible with < E04)

General technical data	
Substance Prohibittance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	0.149 kg
Installation/ mounting/ dimensions	
height	117.3 mm
width	36.6 mm
depth	88.6 mm
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Approvals Certificates	
General Product Approval	EMV



[Confirmation](#)



EMV	Test Certificates	Marine / Shipping
KC	Special Test Certificate	 ABS
		 DNV
		 LRS
		 PRS

other	Environment
Confirmation	Environmental Confirmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4900-0KC00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0KC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0KC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0KC00&lang=en

Characteristic: Tripping characteristics, I^2t , Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0KC00/char>

Characteristic: Installation altitude


<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4900-0KC00&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

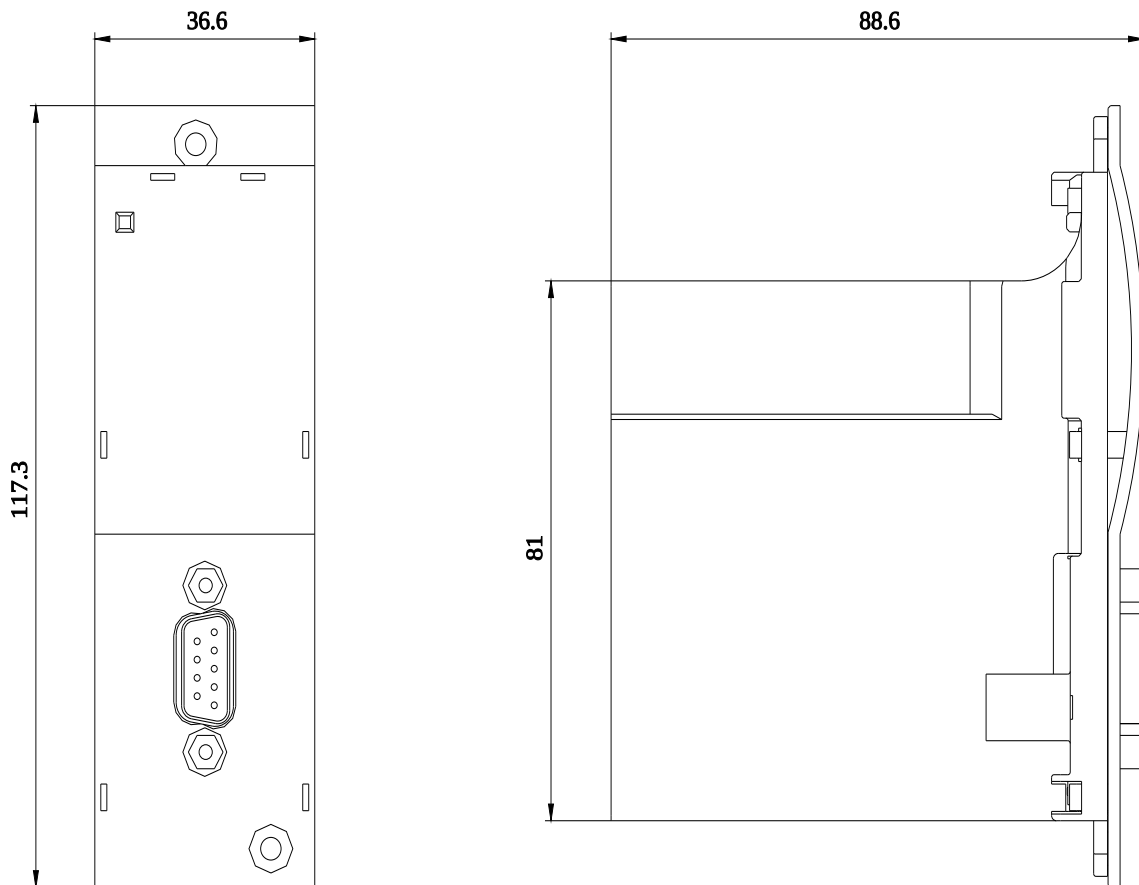

-K1

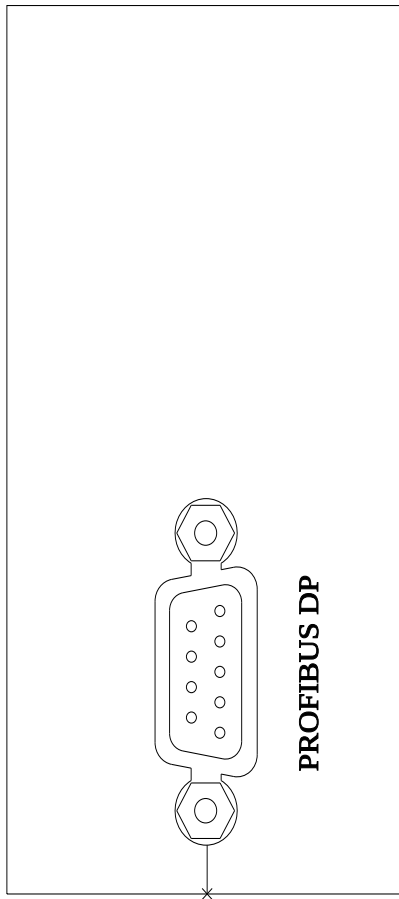

last modified:

3/11/2024 

