




Adjustable Floor Model



Non-Oscillating
Wall Mount / Ceiling Mount

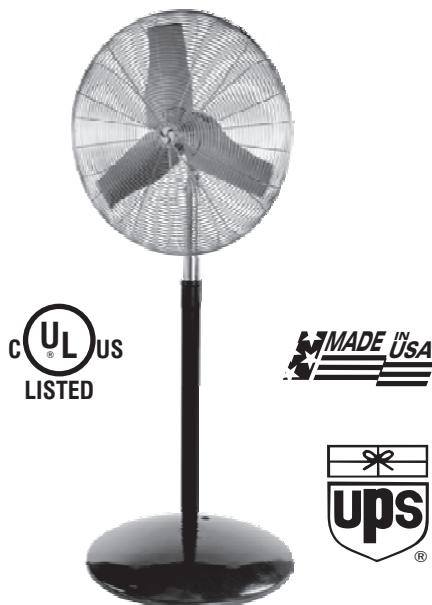

Oscillating Wall Mount

A safety cable kit is included in all overhead mounted air circulators to prevent the fan from falling if accidentally struck or mounting fails. Single safety cable kits consist of 12 feet of 1/16" diameter cable, 2 cable clamps and instructions.

All Parts Packaged in One UPS Shippable Carton

FEATURES

- 5 Mounting Options
- Guard Meets OSHA Standards
- 115V, 60 Hz, 1 Phase, 2 Speed Motors (18" & 20") or 3 Speed Motors (24" & 30") on Non-Oscillating Models
- 115V, 60 Hz, 1 Phase, 3 Speed Motors on Oscillating Models
- 15 Foot Three Conductor Cord and Plug
- 3 Year Warranty
- UL Listed
- All Stocked

NON-OSCILLATING PERFORMANCE 115V

Prop Dia.	CFM			RPM			Motor Number	F. L. Amps
	High	Med	Low	High	Med	Low		
18"	2520	---	1850	1480	---	1020	I-1820M (ODP)	2.6
20"	2670	---	2035	1615	---	1240	I-1820M(ODP)	2.6
24"	5220	4020	2820	1080	700	540	I-3A (TEAO)	2.5
30"	7185	5300	3415	1080	700	540	I-3A (TEAO)	2.7

Performance Ratings are conducted in accordance with AMCA Standard 230-99.

MOTOR TILT ADJUSTMENTS

TYPE	TILT (IN DEGREES)	
	UP	DOWN
FLOOR	30°	15°
WALL	30°	50°
I-BEAM	30°	15°
CEILING	0°	90°

0° = Horizontal Plane

NON-OSCILLATING MODELS - UNIT PACKS

Prop Dia.	Fan Style	EDP Number	Catalog Number	HP	Ship Wt.	List Price
18"	Wall/Ceiling Model	70721	I-18W (2-SP)	1/15	31	\$308
20"	Wall/Ceiling Model	71723	I-20W5 (2-SP)	1/15	38	\$363
24"	Adjustable Floor (S.B.)	71760	ISB-24PA2A (2-SP)	1/3	81	\$457
24"	Wall/Ceiling Model	71725	I-24W2A (2-SP)	1/3	44	\$372
30"	Adjustable Floor (S.B.)	71526	ISB-30PA2A (2-SP)	1/3	90	\$485
30"	Wall/Ceiling Model	71726	I-30W2A (2-SP)	1/3	49	\$402

Unit Pack - Motor, specified Style Mounting, Propeller, Base & Guard shipped in a single carton. S.B. = Solid Base

115V MODELS : OSCILLATING - UNIT PACKS

Prop Dia.	Fan Style	EDP Number	Catalog Number	HP	Ship Wt.	List Price
24"	Adjustable Floor	71567	I-24-OAP	1/3	86	\$504
	Wall Mount*	71565	I-24-OIW	1/3	57	\$458
30"	Adjustable Floor	71568	I-30-OAP	1/3	95	\$529
	Wall Mount*	71566	I-30-OIW	1/3	61	\$492

Wall Mount is supplied with the required Safety Cable Kit. *Used with EDP# 37772 Mounting Bracket. Unit Pack - Motor, Specified Style Mounting, Propeller & Guard shipped in a single carton.

OSCILLATING PERFORMANCE 115V

Prop Dia.	CFM			RPM			Motor Number	F. L. Amps
	High	Med	Low	High	Med	Low		
24"	5548	4699	4062	1110	958	856	0-3B	2.5
30"	7794	5943	5143	1091	871	759	0-3B	2.5

Performance Ratings are conducted in accordance with AMCA Standard 230-99.

MOTOR TILT ADJUSTMENTS

TYPE	TILT (IN DEGREES)	
	OSCILLATING	
	UP	DOWN
FLOOR	20°	20°
WALL	0°	20°

0° = Horizontal Plane