



CCE Exit Series

THIN DIE-CAST LED EMERGENCY EXIT

The CCE Series offers quality and value with a compact and attractive Thin Die-Cast aluminum Exit sign. Exit face illumination by low energy, long-life red or green ultra bright LED's. The Exit face-plate is brushed aluminum with black edges and 6" letters with a red or green diffuser. Single-face models can be wall, end or ceiling mounted. Double-face models are end or ceiling mounted only. Includes canopy and universal mounting plate. Test switch and AC-on indicator located at bottom center. Directional indication made by knock-out chevrons.

Available with battery for emergency operation or AC only.

FEATURES

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Emergency models include long-life 2.4VDC Nickel Cadmium battery for UL recognized 90 minute operation
- Damp Location Listed(0° to 50°C)
- Provided with test switch and AC-On indicator
- Canopy Included
- 24hr. Re-charge


APPLICATION

The CCE Series can be applied in stair-wells, hallways, offices and other commercial applications.

ORDERING GUIDE

| Catalog Number | Description |
|----------------|--|
| CCESRE | Brushed Face, Black Housing, Single-Face, Red, Emergency |
| CCEDRE | Brushed Face, Black Housing, Double-Face, Red, Emergency |
| CCESGE | Brushed Face, Black Housing, Single-Face, Green, Emergency |
| CCEDGE | Brushed Face, Black Housing, Double-Face, Green, Emergency |
| CCESR | Brushed Face, Black Housing, Single-Face, Red, AC |
| CCEDR | Brushed Face, Black Housing, Double-Face, Red, AC |
| CCESG | Brushed Face, Black Housing, Single-Face, Green, AC |
| CCEDG | Brushed Face, Black Housing, Double-Face, Green, AC |

DIMENSIONS

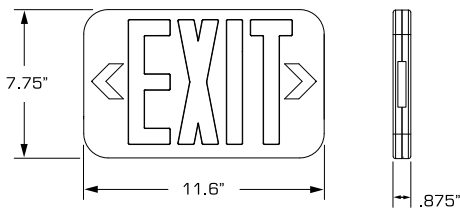

Single Carton Weight: 2.8 lbs.
Master Carton Quantity: 8 each

DATE: _____ LOCATION: _____
 TYPE: _____ PROJECT: _____
 CATALOG #: _____



STANDARDS, CERTIFICATION, AND COMPLIANCE

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA
- CEC T20 Compliant

WARRANTY

2 year full unit warranty

ENERGY CONSUMPTION

| 120 VAC | 277 VAC |
|---------|---------|
| 1 W | 1 W |

