

FTTX FIBER OPTIC CABINET PACKAGE, TYPE 4X



Battery Cabinet



19- or 23-inch rack mounting including cabinet entry boots



Door with foam-in-place gasketing and optional insulation



Door Switch



Ground Bus Bar



Handle

INDUSTRY STANDARDS

UL 508A Listed; Type 4, 4X, 12; File No. E61997

CSA: Type 4, 4X, 12

NEMA/EEMAC Type 4, 4X, 12

EC60529, IP66

Designed to meet Telcordia NEBS GR-487, GR-63 and IEC 48D

EIA 310-D with 19-in. spacing for rack equipment

Cabinet is RoHS compliant

NEBS is a trademark of Telcordia

APPLICATION

Pad-mounted FTTX welded aluminum enclosures provide long-term delivery in outdoor applications. Provided with or without back-up battery compartment.

FEATURES

- Standard pitched roof promotes water runoff
- Available with either single- or dual-access doors on front and rear for convenient access
- Available with or without battery compartment
- 3-point latching mechanisms and padlocking handles on doors provide security
- Seamless foam-in-place gasket seals doors against moisture and dust
- Wind latch mechanisms on doors control door when open for equipment maintenance
- Removable lifting lugs (2) for easy installation
- Rack angles adjustable for 19-in. or 23-in. spacing without use of cage nuts
- Use cage nuts to mount equipment

- Cabinet top insulation helps prevent the formation of condensation and reduces solar gain inside cabinet. Cabinet side insulation is optional.
- Base of cabinet has a 5.00-in. (127-mm) high aluminum mounting plinth to allow for cable alignment
- Three pyramidal boots provided at base of cabinet for sealing various sizes of cables
- All fasteners are stainless steel to maintain professional appearance in severe outdoor climate conditions
- Grounding buss bar provided

SPECIFICATIONS

- Manufactured from Type 5052-H32 .125 in.-thick aluminum
- Seams continuously welded and ground smooth
- Heavy gauge continuous hinge

FINISH

RAL 7035 light textured low-gloss polyester powder paint over

ACCESSORIES


- Fiber Management Spool
- Compact Cooling Fans
- Temperature Control Switches
- Light Package
- Screw Packages
- Fiber Optic Cabinet Pole-Mount Kit
- Compact and Mid-Size Heat Exchangers
- Type 3R, 12, 4 T4 Line Indoor/Outdoor Air Conditioners
- Electric Heaters

BULLETIN: DTX

Standard ProductESSW Vhsngnts A`ssdqx Bn l o`qs l dms


Catalog Number	AxBxC in.	AxBxC mm	Rack Units	Description	MountingKnb`sinm W w X`'lm-(W w X`' l l (	MountingKnb`sinm W w X`' l l (
T303020FTTX	30.00 x 30.00 x 20.00	762 x 762 x 508	10	Single-Access	22 x 17.5	559 x 445
T503020FTTX	50.00 x 30.00 x 20.00	1270 x 762 x 508	22	Single-Access	22 x 17.5	559 x 445
T303020FTTXDA	30.00 x 30.00 x 20.00	762 x 762 x 508	10	Dual-Access	22 x 17.5	559 x 445
T503020FTTXDA	50.00 x 30.00 x 20.00	1270 x 762 x 508	22	Dual-Access	22 x 17.5	559 x 445
T303044FTTXDA	30.00 x 30.00 x 44.00	762 x 762 x 1118	10	Dual-Access	22 x 41.5	559 x 1055
T503044FTTXDA	50.00 x 30.00 x 44.00	1270 x 762 x 1118	22	Dual-Access	22 x 41.5	559 x 1055
T843044FTTXDA	84.00 x 30.00 x 44.00	2134 x 762 x 1118	43	Dual-Access	22 x 41.5	559 x 1055

FTTX Fiber Optic Cabinet Without Battery Compartment

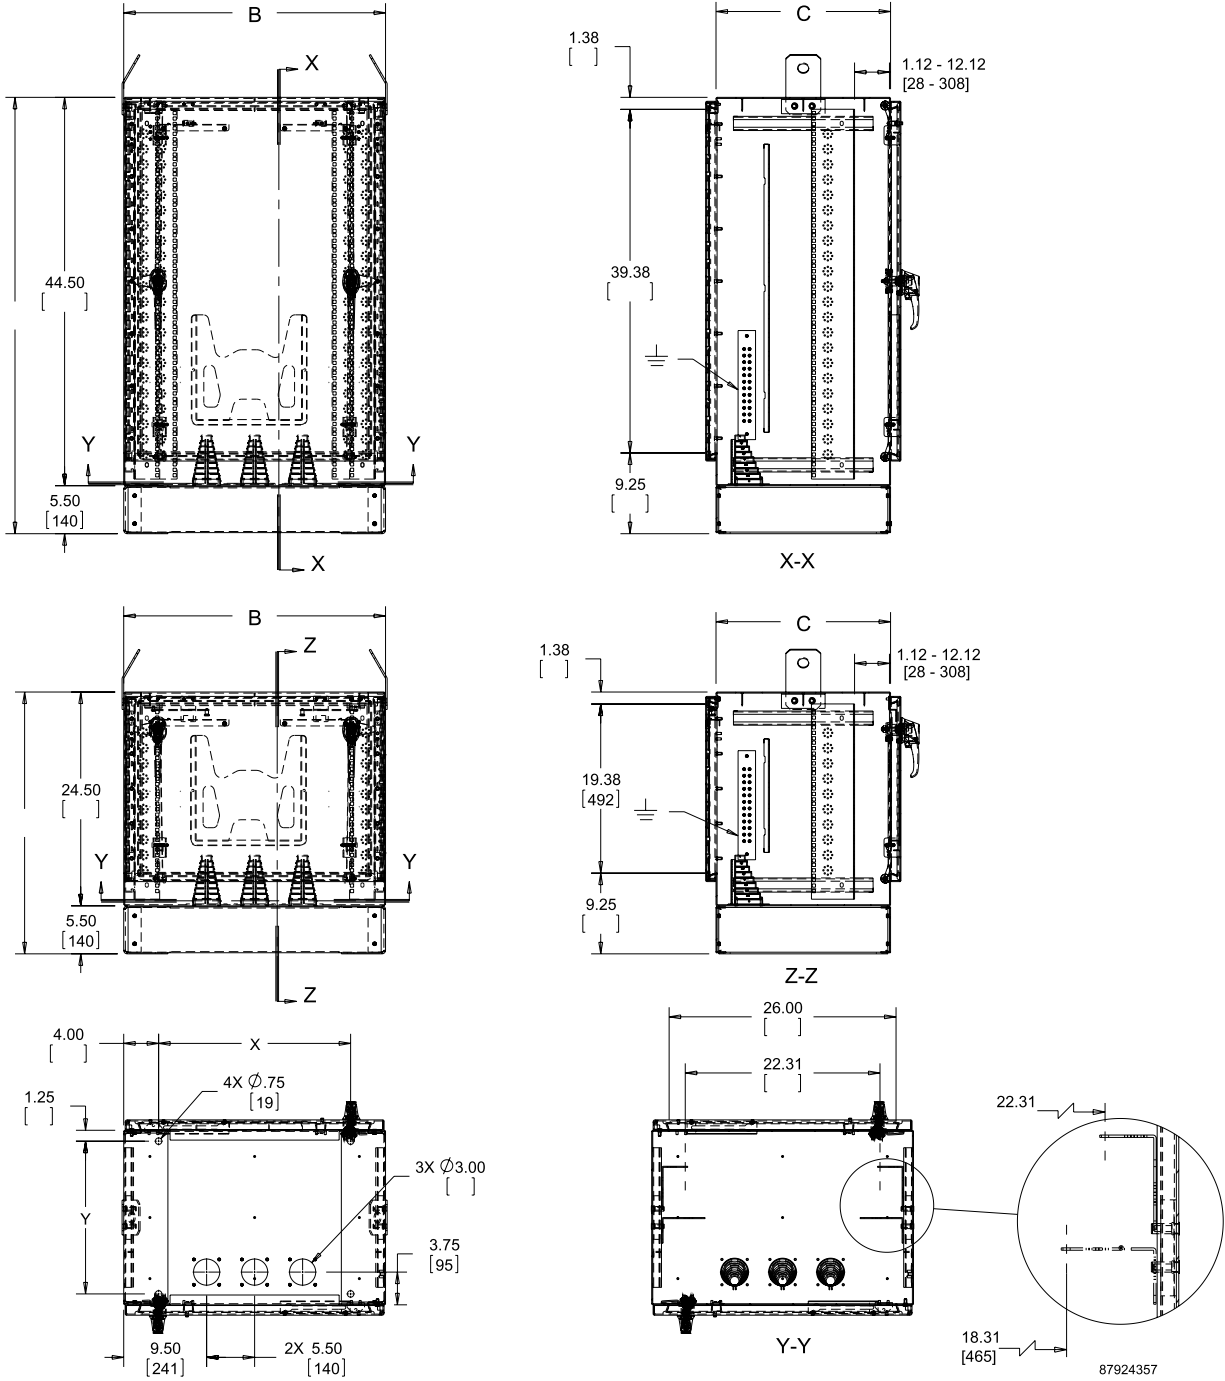

Standard Product: ESSW V hsg A`ssdqx Bn l o`qs l dms

Catalog Number	AxBxC in.	AxBxC mm	Rack Units	Description	S (in.)	S (mm)	MountingKnob`strim WwX`lmm-(	MountingKnob`strim WwX`l l (
T503020FTTXB	59.49 x 30.00 x 23.27	1511 x 762 x 591	22	Single-Access	18.75	476	22 x 17.75	559 X 451
T503028FTTXDAB	59.49 x 30.00 x 34.53	1511 x 762 x 877	22	Dual-Access	24.75	629	22 x 25.5	559 X 648
T503044FTTXDAB	59.49 x 30.00 x 50.53	1511 x 762 x 1283	22	Dual-Access	40.75	1035	22 x 41.5	559 X 1055
T843044FTTXDAB	93.49 x 30.00 x 50.53	2375 x 762 x 1284	43	Dual-Access	40.75	1035	22 x 41.5	559 X 1055

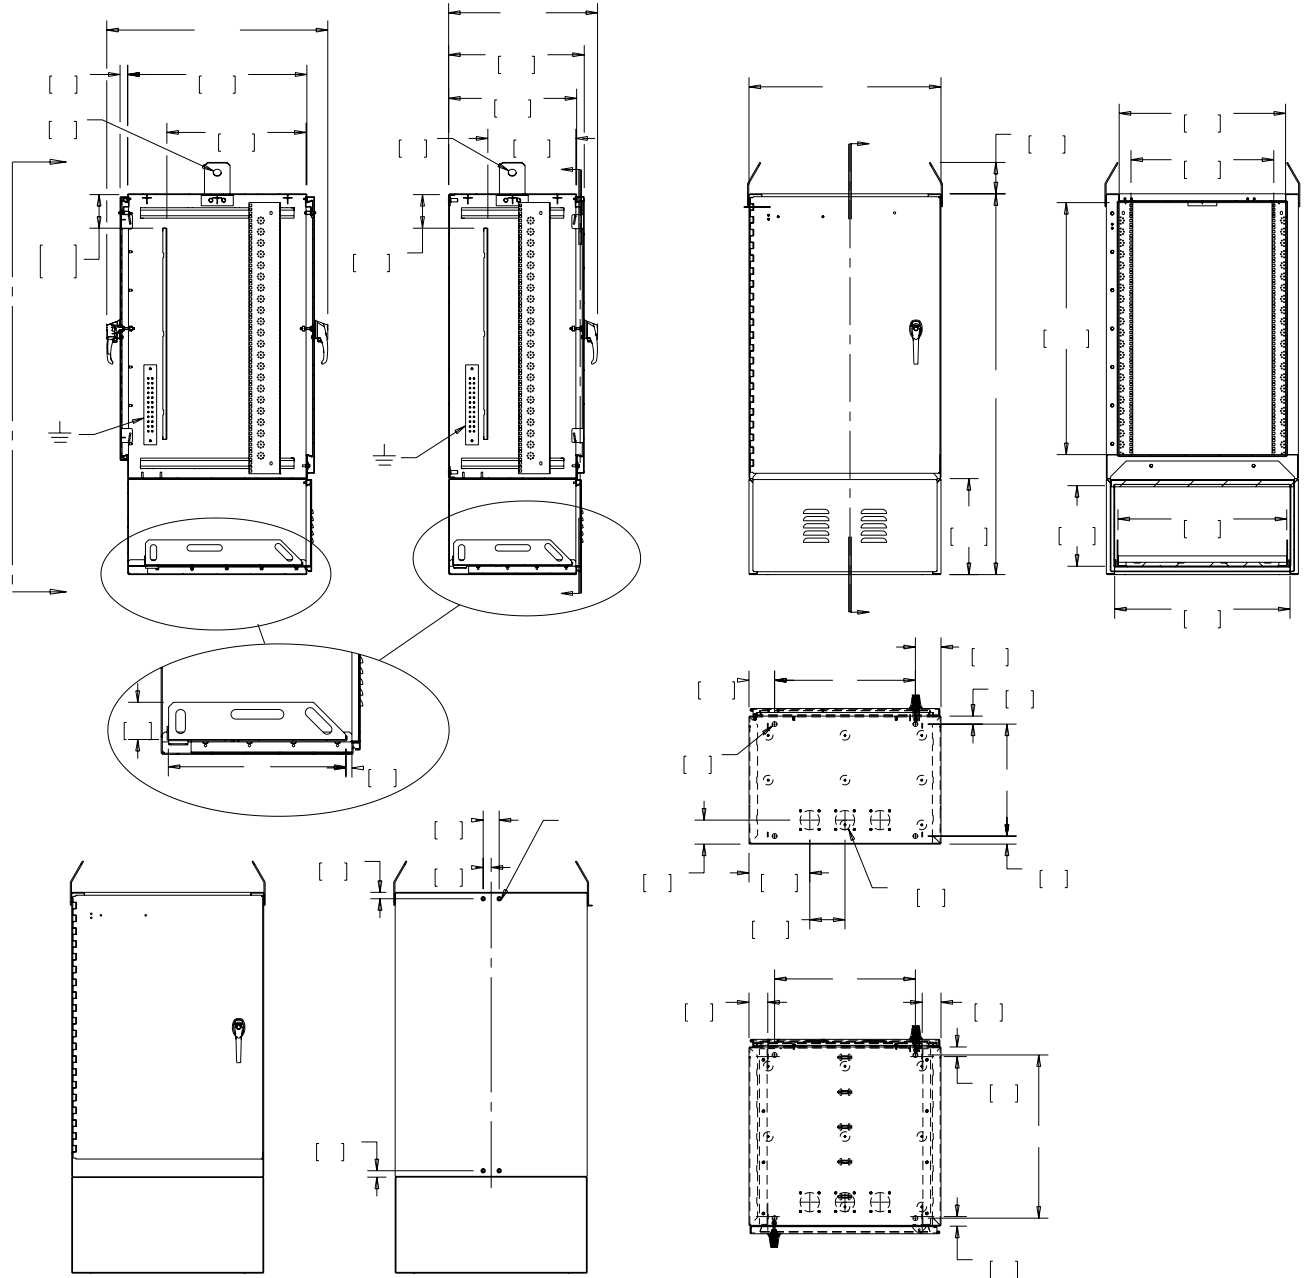

Standard Product

Catalog Number	AxBxC in.	AxBxC mm	Rack Units	Description	AC Model	MountingKnob`shmm WwX`I I (	MountingKnob`shmm WwX`I I (
T503020FTTXSA	50.00 x 30.00 x 20.00	1270 x 762 x 508	22	Single-Access	T290426G161	22 X 17.5	559 X 445
T503044FTTXDASA	50.00 x 30.00 x 44.00	1270 x 762 x 1118	22	Dual-Access	T290426G161	22 X 41.5	559 X 1055
T843044FTTXDASA	84.00 x 30.00 x 44.00	2134 x 762 x 1118	43	Dual-Access	T430626G159	22 X 41.5	559 X 1055

