

Locking Devices

50A Twist-Lock

50A, Short Boot for Plug Device Boot



Ordering Information

& R O R U  
Yellow


8 3 &  
783585808826

& D W D O R J 1 X P E H U  
+ % / & 0

Performance

( Q Y L U R Q P H Q W D O  
Moisture Resistance

IP55 Suitability

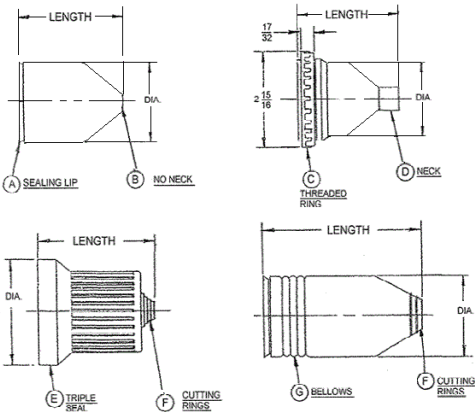

| CATALOG NO. | DIA.    | LENGTH  | COLOR  | DETAILS |
|-------------|---------|---------|--------|---------|
| HBL60CM23   | 1 27/32 | 2 23/32 | YELLOW | A-F     |
| HBL60CM24   | 2 19/32 | 3 29/32 | YELLOW | E-F     |
| HBL60CM31V  | 2 5/16  | 3 15/32 | YELLOW | A-F     |
| HBL60CM32   | 3 1/32  | 4 13/16 | YELLOW | E-F     |
| HBL60CM32V  | 3 1/32  | 4 13/16 | YELLOW | E-F     |
| HBL60CM33V  | 3 1/8   | 2 5/16  | YELLOW | C-F     |

| CATALOG NO. | DIA.  | LENGTH | COLOR  | DETAILS |
|-------------|-------|--------|--------|---------|
| HBL7440V    | 1 3/8 | 1 7/8  | BLACK  | E-D     |
| PH7440      | 1 3/8 | 1 7/8  | YELLOW | A-B     |
| PH7499      | 1 3/8 | 2 3/8  | YELLOW | A-B     |
| HBL77CM15   | 2 5/8 | 5 3/8  | YELLOW | C-F-G   |
| HBL77CM16   | 2 5/8 | 5 5/16 | YELLOW | A-F-G   |
| HBL77CM17   | 2 5/8 | 6 5/16 | YELLOW | A-F-G   |

Online Resources

Customer Sales Drawings

eCatalog

Installation Instructions

