

**Marine IEC Pin and Sleeve**  
**100A, 125/250V, 3 Pole, 4 Wire**

**Corrosion Resistant Watertight Connector**

# HUBBELL

**Features**

- Insulated non-metallic housing
- Color coded housings for easy identification

**Ordering Information**

<b>Description</b> Watertight connector for Standard Service	<b>UPC</b> 783585410029	<b>Catalog Number</b> <b>M4100C12</b>
---	----------------------------	--

**Device Color**  
Yellow

**Standards**

UL Listed, File E146033  
CSA Certified File LR280C  
UL Classified to IEC 60309-1 IEC 60309-2

**Specifications**

Housing	Zytel® ST801 Nylon
Cord Clamps	Reinforced Thermoplastic Polyester
Glands	Solid Neoprene
Covers	Reinforced Thermoplastic Polyester
Gaskets	Solid Neoprene

**Performance**

**Electrical**  
Current Interrupting Certified for current interrupting at full rated current


Dielectric Voltage Withstand 3000V AC  
Max. Working Voltage 600V RMS

**Mechanical**  
Impact Resistance Per CSA C22.2 No. 182.1 / UL1682  
Product Identification Ratings are a permanent part of the device housing  
Terminal Identification Terminals identified in accordance with North American and IEC conventions

**Environmental**  
Flammability HB or better per UL 94 or CSA C22.2 No. 0.17  
Ingress Protection IP67 Suitability  
Moisture Resistance Watertight per IEC 60309-1  
Operating Temperatures Maximum Continuous 75°C; Minimum - 40°C w/o impact

**Online Resources**

Customer Use Drawing  
eCatalog  
Installation Instructions

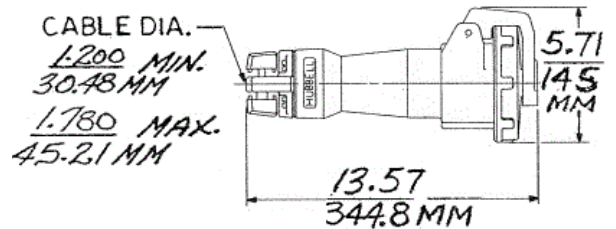

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

