

Standard

STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information		
Lamp Type	CFQ26W/G24D	
Number of Lamps	2 piece/unit	
Lamp Footage	-	
Ballast Type	Magnetic Fluorescent	
Base Model	H2Q26TPBLS	
Suitable For Outdoor Use	Yes	
Automatic Restart	Yes	
Operating and Electrical		
Input Voltage	120 V	
Input Frequency	60 Hz	
Max THD	15 %	
Power (Rated) (Nom)	26 W	
Starting Method	Preheat	
Lamp Current Crest Factor (Nom)	1.7	
Ignition Time (Nom)	1 s	
Inp. Current (Open Circuit)	0	
Ballast Factor (Nom)	0.9	
Power Factor (Nom)	0.98	
Input Current (Operating) (Nom)	0.44 A	
Input Power (Nom)		52 W
Rated Lamp Watts		26W W
Wiring		
Wire Striplength	0.50/0.375 mm	
Lamp Connection	Series	
Wire Length By Color	See data sheet	
Wire Gauge (Nom)	18AWG mm	
Wire Type	Solid	
Remote Wiring Configuration Allowed	Yes	
Tandem Wiring Configuration Allowed	Yes	
Through Wiring Configuration Allowed	Yes	
Max Ballast-Lamp Distance Remote Wiring	30'	
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'	
Max Ballast-Lamp Distance Through Wiring	Any = 30'	
Mechanical and Housing		
Housing Material	Metal	
Housing	R5	
Housing Dimensions	9.5" x 2.38" x 1.69"	

Standard


Approval and Application

EMC Immunity Standard	FCC Non-Consumer
Sound Rating	A
UL Recognized	No

Product Data

Order product name	STANDARD H2Q26TPBLSM
EAN/UPC - Product	781087002254

Dimensional drawing

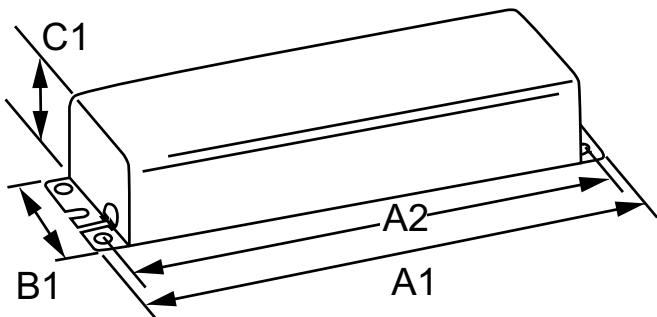

MAG BALLAST (2) 26W COMPACT(2-PIN) 120V

Order code	H2Q26TPBLSM
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913700589709
Net Weight (Piece)	1.611 kg

Product	A1	A2	B1	C1

