



1. IDENTIFICATION: VERTICAL, (24) 5-20R NETWORKED
120V / 30A / SINGLE-PHASE POU


PANDUIT P/N	WEIGHT
QZ1A1M2BM24E1	17 lb (7.7 kg)





2. ACCESSORY COMPONENTS:
- (4) #10-32 x 1/2" MOUNTING SCREWS
 - (4) #12-24 x 1/2" MOUNTING SCREWS
 - (2) #10-32 LOCKING COLLAR SCREWS
 - (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
- 4. CURRENT METER - RED, 4-DIGIT LED DISPLAY PROVIDES TRUE RMS CURRENT THAT CONTINUOUSLY SCROLLS THROUGH THE THREE DIFFERENT MEASURED CIRCUITS. METER DISPLAYS CIRCUIT NAME FOLLOWED BY THE MEASURED CURRENT (E.G. CR-1 REPRESENTS PHASE 1). BREAKER/AGGREGATE CURRENT MONITORING CAN ALSO BE ACCESSED REMOTELY VIA ETHERNET CONNECTION.
 - 5. UL® & c-UL® LISTED 60950.
 - 6. RoHS COMPLIANT.
 - 7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
 - 8. MAXIMUM AVAILABLE POWER = 2.9 KW
- 

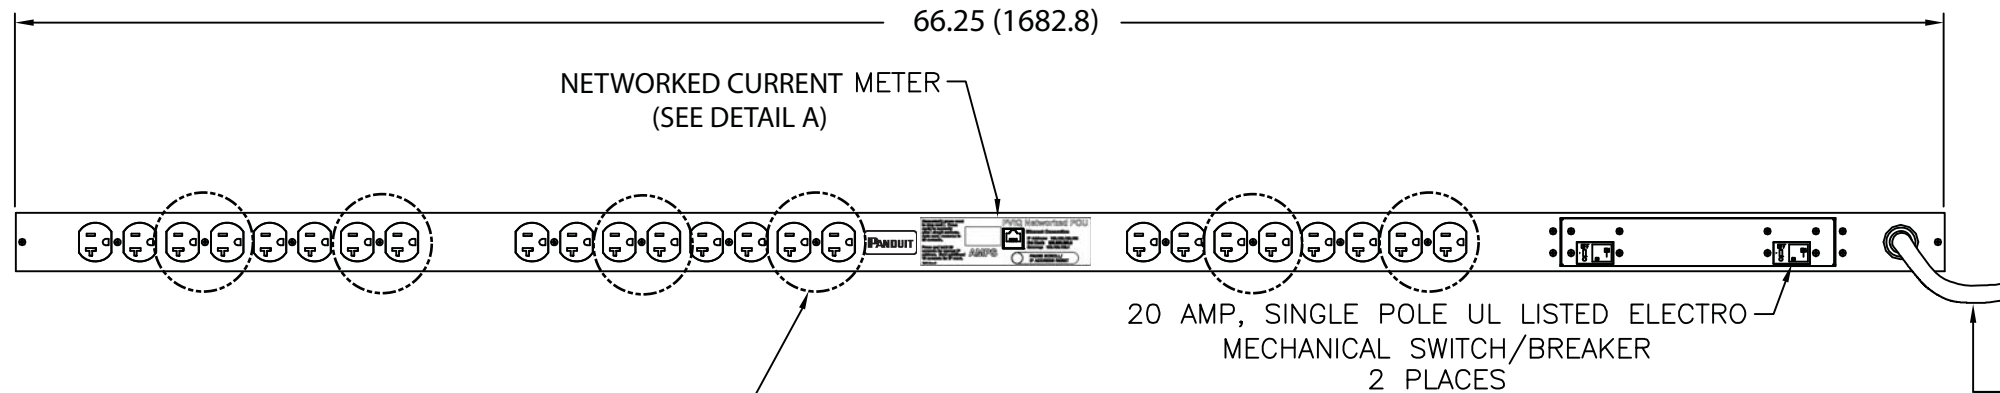

ALTERNATING RED (CIRCLED) AND IVORY RECEPTACLES

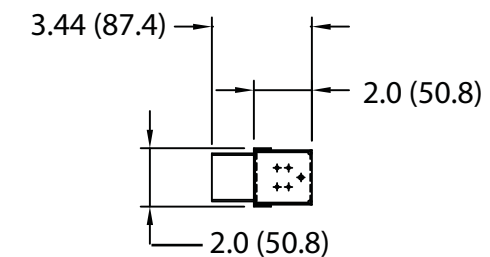

— 10 FOOT INLET POWER CORD



00A	11-23-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098NQ				
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH	

MODEL FILENAME		09V098NQ/00.PRT	
CAD FILENAME/LAYERS		09V098NQ_DC/00A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
VERTICAL, (24) 5-20R NETWORKED POWER OUTLET UNIT (QZ1A1M2BM24E1) CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005		[METRIC - MILLIMETER] X. +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13	
ANGLE +/- 1°		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
DRAWN BY MAV		SCALE NONE	
DATE 11-23-10		DRAWING NO. 09V098NQ	
CHK'D KRKE		DWG B SHEET	