

Twist-Lock® Devices  
 30A, 125V AC, 2 Pole, 3 Wire Grounding  
 Corrosion Resistant Valise® Connector

# HUBBELL

## Features

- Powerful cord grips prevent conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body
- Unique patented corrosion resistant clamp type terminals provide a superior electrical connection by bundling the conductor strands when clamps are tightened



## Ordering Information

| Description                        | Cord Diameter              | UPC          | Catalog Number |
|------------------------------------|----------------------------|--------------|----------------|
| Corrosion resistant, yellow nylon. | .590"-.930"<br>(15.0-23.6) | 783585808239 | HBL26CM13V     |

## Listings

Listed to UL 498  
 Fed.Spec. W-C-596  
 Certified to CSA C22.2 No.42

## Specifications

|                 |   |
|-----------------|---|
| Contacts        | Brass - Nickel plated                                     |
| Terminal Clamps | Silicon Bronze - Nickel plated                            |
| Terminal Screws | #8 - 32 Stainless Steel (Philips / Slotted / Robertson)   |
| Housing         | Yellow nylon  |
| Clamp Screws    | #8 - 32 Stainless Steel - (Philips / Slotted / Robertson) |


## Performance

| Electrical           |                                  |
|----------------------|----------------------------------|
| Current Interrupting | Certified for full rated current |
| Dielectric Voltage   | Withstands 2,000V minimum        |

| Mechanical             |  |
|------------------------|--|
| Terminal Accommodation | #18 AWG - #10 AWG stranded copper wire only. |

|                         |  |
|-------------------------|--|
| Terminal Identification | Terminals identified in accordance with UL 498 |
|-------------------------|--|

| Environmental          |  |
|------------------------|--|
| Flammability           | HB or better per UL 94 or CSA 22.2 No. 0.6         |
| Moisture Resistance    | IP20 Suitability                                   |
| Operating Temperatures | Maximum Continuous 75°C Minimum -40°C (w/o impact) |

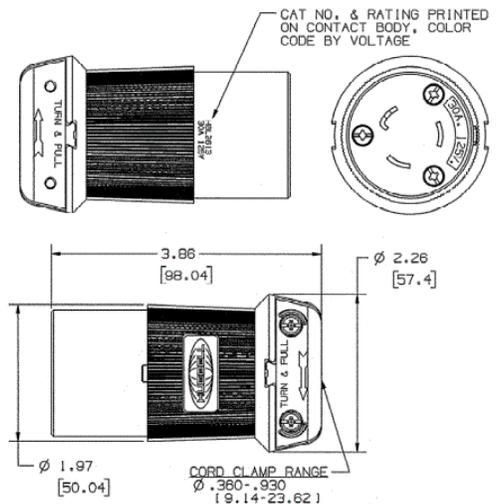

## Accessories

|                   |            |
|-------------------|------------|
| Plug              | HBL26CM13V |
| Weatherproof Boot | HBL60CM32V |
| Flanged Inlet     | HBL2615    |
| Weatherproof Boot | HBL60CM31V |

## Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

