

TradeSelect

15 A, 125 VAC, 2-Pole, 3-Wire Grounding

Receptacles, Residential Grade, Single


HUBBELL

- Features
- Smooth indented face appearance
  - Multiple-drive Slot/Phillips/Robertson head screws
  - Tough thermoplastic ultrasonically welded cover and base

| Ordering Information |              |                |
|----------------------|--------------|----------------|
| Color                | UPC          | Catalog Number |
| Ivory                | 883778100222 | RR151I         |

| Specifications           |   |
|--------------------------|---|
| NEMA Rating              | 5-15R   |
| Wire Size                | #14 AWG to #12 AWG                              |
| Wattage                  | 1875  |
| Environmental Conditions | Indoor Dry Unless Protected By Additional Means |
| Special Features         | Self Grounding                                  |
| Phase                    | Single Phase                                    |

| Performance           |  |
|-----------------------|--|
| Environmental         |  |
| Operating temperature | 20°C to 60°C   |
| Mechanical            |  |
| Terminal              | Terminal screws accepts up to #12 AWG, Push wire designed for #14 AWG solid copper wire only |

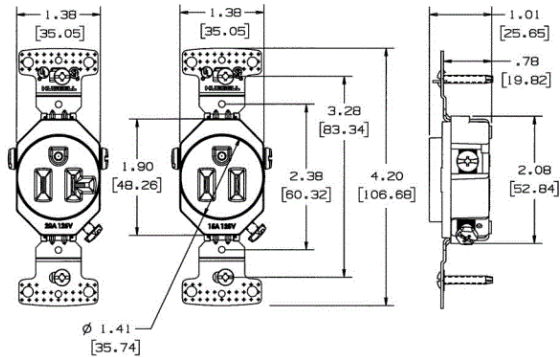

Online Resources

Customer Sales Drawings

eCatalog

Installation Instructions

