

FEATURES & SPECIFICATIONS

INTENDED USE — For pendant-mounting the Extreme® LV all-conditions exit sign, both standard or EL option for wet location applications. Not recommended for areas prone to vandalism.

INSTALLATION — Mounts to 3/4" rigid conduit and 3/4-14/UNC nipple connector (required). Only available for top mount installation.

Exit sign must be ordered with the UM (Universal mount option).

WARRANTY — Limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.


Catalog Number
Notes
Type

Indura®

LV Exit Sign Accessory

ELA VSA

STEM/CONDUIT
MOUNTING KIT

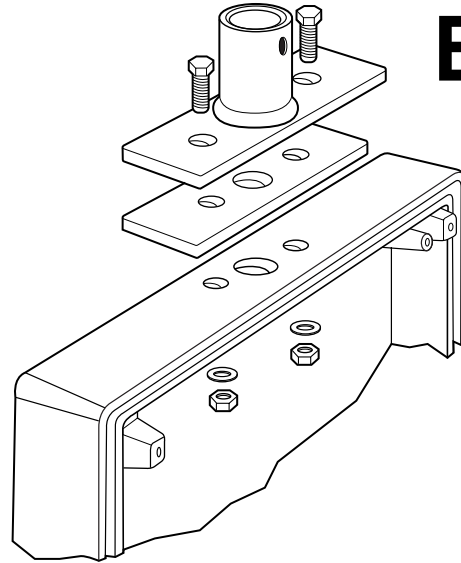

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: ELA VSA 1B

Catalog Number ¹	
ELA VSA 1B	Stem/conduit mounting accessory for Extreme single face with black mounting
ELA VSA 1W	Stem/conduit mounting accessory for Extreme single face with white mounting
ELA VSA 2B	Stem/conduit mounting accessory for Extreme double face with black mounting
ELA VSA2W	Stem/conduit mounting accessory for Extreme double face with white mounting

Notes

1 Must specify housing color and number of faces.