



MILBANK
ENERGY AT WORK




A-36P36W


| | |
|-------------------------------|--|
| Catalog Number | A-36P36W |
| Marketing Product Description | Back Panel Non UL Listed 36x36 Hinge And Screw Cover No Paint Wood Hole Pattern |
| UPC | 784572187214 |
| Length (IN) | 0.75 |
| Width (IN) | 33 |
| Height (IN) | 33 |
| Weight (LB) | 16.2 |
| Brand Name | Milbank |
| Type | Panel for Mounting Electronic Controls |
| Application | Enclosure Accessory |
| Material | 3/4 Inch-7 Ply Plywood |
| Finish | Unpainted |
| Shape | Square |
| Size | 0.75L x 33W x 33H |
| Color | Unpainted |
| Construction | Sheared |
| Mounting | Stud Mount |
| NEMA Rating | No Rating |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

| CATALOG # | DIM " A " | DIM " B " |
|-----------|-----------|-----------|
| A-44P30W | 27.00 | 41.00 |
| A-72P30W | 27.00 | 69.00 |
| A-54P32W | 29.00 | 51.00 |
| A-36P36W | 33.00 | 33.00 |
| A-40P40W | 37.00 | 37.00 |
| A-42P36W | 33.00 | 39.00 |
| A-48P36W | 33.00 | 45.00 |
| A-60P36W | 33.00 | 57.00 |
| A-72P36W | 33.00 | 69.00 |
| A-42P42W | 39.00 | 39.00 |
| A-42P48W | 39.00 | 45.00 |
| A-42P60W | 39.00 | 57.00 |
| A-44P36W | 40.00 | 32.00 |
| A-44P48W | 40.00 | 44.00 |
| A-48P48W | 44.00 | 44.00 |
| A-60P60W | 56.00 | 56.00 |
| A-62P44W | 41.00 | 59.00 |
| A-96P48W | 45.00 | 91.00 |
| A-52P52W | 48.00 | 48.00 |

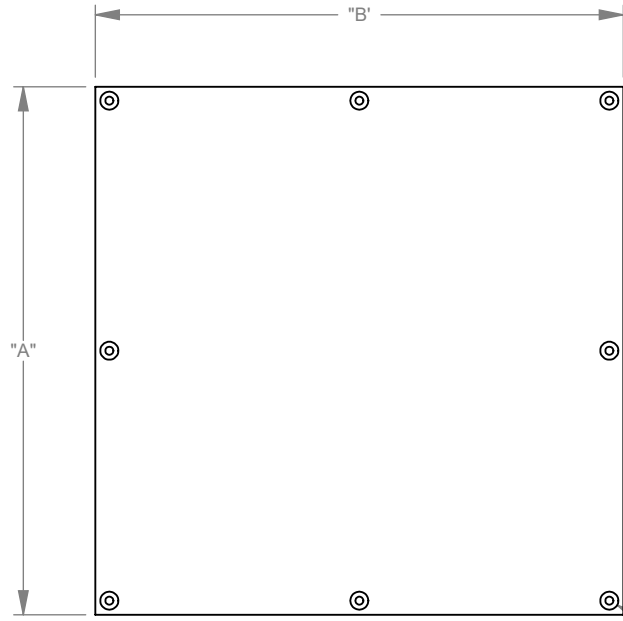

4X Ø 1/2" THRU ALL
 ⌊ Ø 1 1/8" ⌋ 3/8"

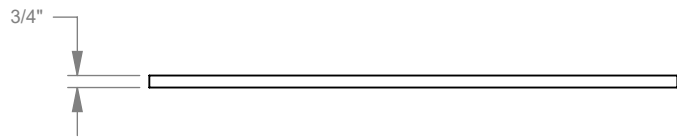

Version:

1

**All dimensions are +/- 1/16".
 Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.