

Easily configure the assembly in 3D or choose from our popular preassemblies.

The order is delivered directly from the factory to the job site, fully assembled and labeled as requested.

Delivery is made when requested, so planning can be more effective.

Installers have the finished assemblies they need, built to the same high, consistent standard and labeled for every installation point. The result? Big savings on labor, inventory, and shipping.

In commercial construction, labor cost is the single largest expense for an electrical contractor. It can be particularly costly to have experienced electricians assembling the thousands of components needed to route, terminate, support, and protect a complicated commercial or institutional electrical system.

eFab takes care of the rough-in labor. You will save on inventory and shipping. And because your components come preassembled in the exact number you require, there is no worry about minimum order requirements on the individual parts, which often lead to leftovers.

Tap into the ef ciencies of eFab and you will see signi cant savings in all these areas:

- **Labor Savings—**Custom-designed assemblies of components can save you more than 50% on in-wall rough-in installation costs.
- **Material Savings—**Special eFab ARRA and Buy-America assemblies can reduce overall material costs by up to 40%.
- **Logistics Savings—**Deliveries of project-speci c packaging and labeling direct to the job site reduce material handling and inventory costs.
- **Reduced Waste—**Palletized eFab assemblies reduce on-site packaging and waste.
- **Process Improvements—**eFab lets you design, quote, and order your in-wall rough-in electrical systems and manage it all online.
- **Extensive Project Support**

The eFab Configurator

Configure your assembly. Then, figure your savings.

Contractors make or break the bank within the wall and ceiling, with installation accounting for 60–70% of the project cost. Use the Conf gurator and save.

Through its easy-to-use, intuitive cloud-based interface, the eFab Con gurator gives you the power of full 3D manipulation, so you can design, edit, and manage an unlimited number of con gurations. As you select parts, the eFab Con gurator generates a 3D image of your assembly and assigns a part number, eliminating miscommunication.

Once your 3D assembly is complete, you can:

- Specify how parts should be labeled and packaged together for added ease on the job site
- Instantly receive a quote
- Download your 3D image for submittal, including DXF file
- Produce a drawing with part numbers
- Print a bill of materials (BOM), including catalog numbers and descriptions

eFab creates a library of your assemblies, which can be accessed through the cloud by co-workers for reference or for ordering. Your assembly can be accessed anytime, anywhere from any computer connected to the internet.

There's a T&B engineered solution for every project:

Schools | Off ce Buildings | Residential Developments
Hospitals and Other Health Care Facilities | Mixed-Use Complexes
Retail Centers | Hotels | Resorts | Data Centers

Whether you con gure your own assembly or select one of our standard options, you will realize substantial labor cost savings. To calculate the savings associated with each type of assembly, check out our Labor Savings Calculator at . You can adjust the labor rate, quantities, and material costs to forecast your savings in both dollars and time.

To learn more visit , where you can view a demo video and access the eFab Configurator.

Consistent box locations and box height…every time

Consistency results in ef ciency and labor savings on the job. With three xed box locations and a xed height of 18", the Steel City® Pre-Fab T Bracket provides a consistent installation every time. For added ef ciency, the bracket includes integral mounting screws that help reduce installation time. A handy locator tab at the base of the bracket saves you the time of looking for installed boxes that have been hidden by wall coverings. The base also features unique oor track tabs. The inner tab slides in front of the oor track, and the two outer tabs slide behind the oor track to provide stability when positioning the bracket.

Integral Mounting Screws
Reduce installation time

Key Hole Slots
Maintain box position if mud ring is removed

Mud Ring Mounting Screw Holes
For low-voltage applications where no box is required

3 Fixed Box Locations
Each accommodates both 4" & 4 11/16" boxes

18" Fixed Height

16" Fixed Width

Stability Ridges
For added support

Locator Tab
Helps locate installed boxes hidden by wall coverings

Floor Track Tabs
Provides stability when positioning the bracket

Floor Mount T Bracket

Cat. No.	Description	Std. Pkg. Quantity	UPC Number
H16V18S	Pre-Fab T Bracket	10	785991-04801

- Improved bracket with bendable stabilizer leg for use on 2½" and 3½" metal studs
- Mounts outlet boxes 12" or 18" offset from either a metal stud track or a stud
- When mounted, drywall ring is brought to within ⅛" of drywall every time and will not budge or break out drywall
- Mounts 4" or 4 11/16" outlet boxes, 1½" or 2⅛" deep
- SV18 provides compliance with Americans with Disabilities Act (ADA) requirements

Extension Plate Bracket

Cat. No.	Description	Std. Ctn.
SSF-SV12	Extension plate bracket, 12" height	50
SSF-SV18	Extension plate bracket, 18" height	50

SSF-SV18

- Constructed of 24-gauge steel
- Pre-measured on center for 16" (SBO16) or 24" (SBO24) stud spacing
- SBO16 accepts three 4" square or two 4 11/16" boxes (deep or shallow)
- SBO24 accepts five 4" square or four 4 11/16" boxes (deep or shallow)
- Can be mounted at any height to meet individual project requirements
- Versatile, open design enables mounting of box in any location across horizontal plane between studs
- Device cover (mud ring) mounts to front of bracket to set box in desired location
- Stamped rule on bracket with ¼", ½", and 1" markings

SBO16

SBO24

SBO24 mounted to 24" studs with one 4" square box installed



SBO24 mounted to 24" studs with five 4" square boxes (full capacity) installed

Stud-to-Stud Mounting Brackets

Cat. No.	Description	Std. Pkg. Quantity	UPC Number
SBO16	16" Stud-to-Stud Horizontal Mounting Bracket	25	78599103893
SBO24	24" Stud-to-Stud Horizontal Mounting Bracket	25	78599103895

- Supports electrical boxes, plaster rings, or low-voltage devices from one bracket
- Accommodates 4" or 4 11/16" boxes
- Bendable leg serves as a bracket stabilizer
- SB brackets allow box mounting in all four 90° orientations

H16S

H24S

Stud-to-Stud Mounting Brackets — Fixed Box Position

Cat. No.	Description	Std. Ctn.
H16S	Box mounting bracket for between studs, 16" stud spacing	25
H24S	Box mounting bracket for between studs, 24" stud spacing	25

Three products in one.

The savings can add up, particularly on a large job, when a box bracket, far-side support, and cable support are combined in one product to reduce your labor and inventory costs. It is designed for maximum exibility with anges for either left or right stud mount, and compatibility with both 4" and 4 11/16" boxes.

- Built-in cable support secures cable 6" above the box, satisfying NEC® code requirements
- Flexible design accommodates both 4" and 4 11/16" boxes
- Key-hole box mounting slots maintain box position if mud ring needs to be removed
- Provides clear access to knockouts once the box is installed for installation of ttings
- Mounts to either side of the stud

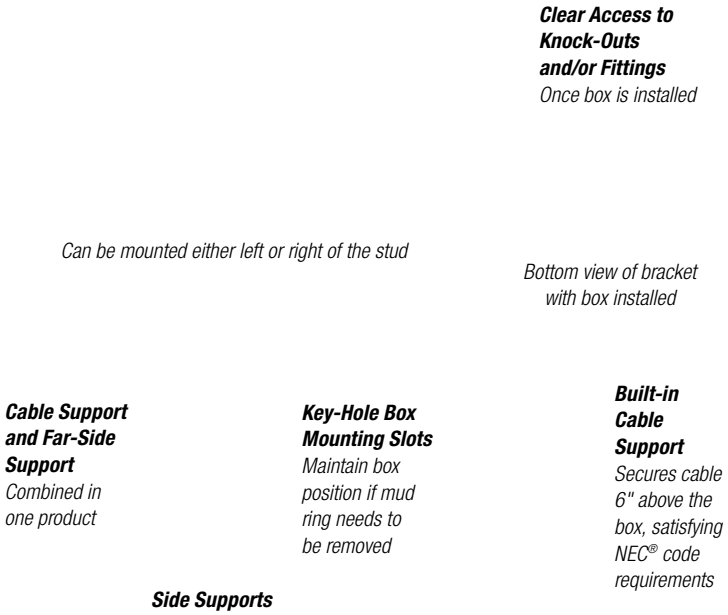

Box-to-Stud Mounting Bracket With Far-Side and Cable Support

Cat. No.	Description	Std. Pkg. Quantity
SSF-SH2346-CS	Pre-Fab Box Bracket with Far-Side and Cable Support	50

- Attaches 4" and 4 11/16" electrical boxes to metal stud
- Support leg can be attached to stud to eliminate movement of box in wall
- Attaches to metal or wood stud using self-tapping screws and screw gun or nails
- One part mounts boxes for 1½", 2½", 3½", 4", and 6" studs, which means less inventory

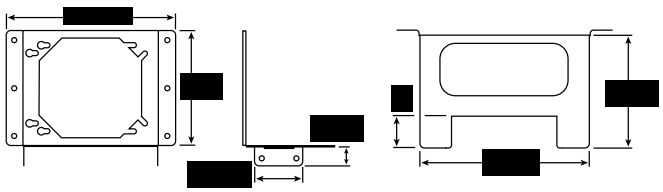

SSF-SH2346

Box-to-Stud Mounting Brackets

Cat. No.	Description	Std. Pkg. Quantity	UPC Number
SSF-SH2346	Bracket for mounting 4" or 4 11/16" box to 1½", 2½", 3½", 4", or 6" stud	100	78599120731

One component replaces two, reducing both material and labor costs.

Locator Hole
In mounting bracket enables installer to position box on marked stud for fast, precise installation

Power on both sides of the stud

Accommodates both 4" and 4 11/16" boxes

Built-In Far Side Support
Stabilizes box and bracket assembly to ease installation and eliminate the need to purchase and install extra components

Low voltage on both sides of the stud

Power and low voltage on the same side of the stud

Dual Box-to-Stud Mounting Bracket

Cat. No.	Description	Std. Pkg. Quantity	UPC Number
DBB1	Pre-Fab Dual Box Bracket	50	785991-04625

Power left of the stud

Low voltage right of the stud

- Combines a box-to-stud mounting bracket with a device cover in one easy-to-use product
- Designed for use with 4" square boxes
- Used with both steel and wood studs
- Cover raised ½", ⅝", or ¾"
- Designed for one or two devices

52CM14-5/8

Box Support Covers

Cat. No.	Raised	No. of Devices	Cu. In. Cap.	Std. Pkg. Quantity	UPC Number
52CM13	½"	1	3.0	25	78599102634
52CM14-5/8	⅝"	1	4.0	25	78599102635
52CM14	¾"	1	5.0	25	78599102636
52CMD17	½"	2	6.3	25	78599102637
52CMD18-5/8	⅝"	2	7.3	25	78599102638
52CMD18	¾"	2	9.0	25	78599102639

- Designed for metal studs 16" or 24" on center
- Can also be adjusted for non-standard stud spacing
- Adjustable tabs accommodate 1½" or 2⅛" box depths
- Enables mounting of multiple boxes
- Installs easily—dimples provide a starting point for screws

SSF-SG16A

Adjustable Box Brackets

Cat. No.	Description	Stud Spacing	Box Depth	Std. Pkg. Quantity	UPC Number
SSF-SG16A	16" Adjustable Box Bracket	11"–18"	1½" or 2⅛"	50	78599101489
SSF-SG24A	24" Adjustable Box Bracket	17"–26"	1½" or 2⅛"	50	78599101490

Available in both single- and two-gang.

UL-listed mud rings feature an inner ring that adjusts from ½" to 1½" in depth to accommodate various drywall thicknesses. Marked with a measured rule and equipped with two adjustment screws, the inner ring can be set to the anticipated depth prior to installation and then easily adjusted after drywall installation to accommodate any variation in depth (½" to 1½").

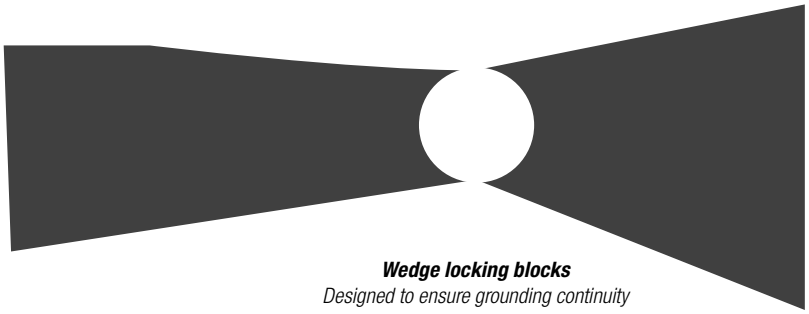

Wedge locking blocks
Designed to ensure grounding continuity

Adjustable Mud Ring

Cat. No.	Description	Std. Ctn.
52-C-ADJ	Single-Gang Adjustable Mud Ring, ½" to 1½"	25
52-C-ADJ2	Two-Gang Adjustable Mud Ring, ½" to 1½"	20

Meets code requirements for supporting and securing installed MC cable.

- Provides a simple means of complying with NEC® 330.30 requirements for securing and supporting MC cable
- Quick and easy locking tab snaps through slot to secure cable
- Ribs maintain separation of cables
- Durable steel construction retains integrity
- Versatile design—use with Romex or MC cable
- UL listed

CSB1

Cable Support Bracket

Cat. No.	Description	Std. Ctn.
CSB1	Cable Support Bracket	100

- Supports ½" and ¾" EMT conduit and MC/AC cable
- Works with wood or metal stud
- Preset bend provides alignment with knockouts for 1½"-deep boxes or 2⅛"-deep boxes

Screw-On Conduit Support

Cat. No.	Fig. No.	Description	Std. Ctn.
SSF-SS1/2 3/4	1	½" and ¾" EMT conduit and MC/AC to metal or wood stud. For 1½" deep box.	100
SSF-SS1/2 3/4D		½" and ¾" EMT conduit and MC/AC to metal or wood stud. For 2⅛" deep box.	100

Fig. 1



- Increased capacity accommodates large devices in commercial and industrial applications, such as re alarm systems
- Red-painted version available for quick and easy identi cation of life-safety electrical systems
- Available with or without integrally mounted support bracket

521911234

521911234RD

521911234CV

521911234CVRD

Super Deep 4" Square Wall Boxes

Cat. No.	Description	Ears	Brkts.	Each Side KO	Each End KO	Bottom KO	Cu. Inch Capacity	Std. Ctn.
521911234RD	3½"-Deep, 4"-Square Red Box	—	—	(4) ½" & ¾" Combo	(2) ½" & ¾" Combo	(4) ½" & ¾" Combo	46	24
521911234CVRD	3½"-Deep, 4"-Square Red Box with Side Mounting Bracket	—	CV	(4) ½" & ¾" Combo	(2) ½" & ¾" Combo	(4) ½" & ¾" Combo	46	10
521911234	3½"-Deep, 4"-Square Box	—	—	(4) ½" & ¾" Combo	(2) ½" & ¾" Combo	(4) ½" & ¾" Combo	46	24
521911234CV	3½"-Deep, 4"-Square Box with Side Mounting Bracket	—	CV	(4) ½" & ¾" Combo	(2) ½" & ¾" Combo	(4) ½" & ¾" Combo	46	10

Easy to identify and install.

Steel City® Fire Alarm Boxes and Fittings can meet all of your visual identification requirements for fire alarm systems—and make installation and upgrades faster and easier than ever before. Available in a variety of sizes to accommodate new or old work con gurations, these boxes are simple to install with high-quality Thomas & Betts ttings. Plus the bright red nish eliminates time-consuming painting of existing xtures and provides long-lasting identi cation in even the harshest environments.



52171-1234RD



72171-1234RD



52171-EXTRD

52-C-1RD



52151-1234RD



52171-CV-1234RD

52171-EXTOWRD



53171-1234RD

Fire Alarm Boxes

Cat. No.	Description	Ears	Brkts.	Each Side Conduit	Each End Conduit	Bottom Conduit	Cu. Inch Capacity	Std. Ctn.
52171-1234RD	2⅛"-deep 4-square red box	—	—	2½", 1½" & ¾"E	2½", 1½" & ¾"E	3½", 2½" & ¾"E	30.3	50
52151-1234RD	1½"-deep drawn red box	—	—	2½", 1¾"	2½", 1¾"	3½", 2¾"	21.0	50
72171-1234RD	2⅛"-deep 4 11/16" red box	—	—	3½" & ¾"E	3½" & ¾"E	3½", 2½" & ¾"E	42.0	20
52171-CV-1234RD	2⅛"-deep 4-square red box with CV bracket	—	CV	2½", 1½" & ¾"E	2½", 1½" & ¾"E	3½", 2½" & ¾"E	30.3	50
52171-EXTRD	2⅛"-deep 4-square red box with ext. ring	—	—	4½", 2½" & ¾"E	4½", 2½" & ¾"E	3½", 2½" & ¾"E	60.6	25
52171-EXTOWRD	2⅛"-deep 4-square red box with ext. ring and old work ears	Yes	—	4½", 2½" & ¾"E	4½", 2½" & ¾"E	3½", 2½" & ¾"E	60.6	25
52-C-1RD	Flat 4-square red cover	—	—	—	—	—	—	100
53171-1234RD	2⅛"-deep 4-square red extension ring	—	—	2½", 1½" & ¾"E	2½", 1½" & ¾"E	—	30.3	25

TK122A-FA

TK121A-FA

TC122A-FA

TC121A-FA

Fire Alarm Fittings

Cat. No.	Description	Std. Ctn.
TC121A-FA	½" Red Steel EMT Set Screw Connector	50
TC122A-FA	¾" Red Steel EMT Set Screw Connector	50
TC123A-FA	1" Red Steel EMT Set Screw Connector	25
TC721A-FA	½" Red Insulated Steel EMT Set Screw Connector	50
TC722A-FA	¾" Red Insulated Steel EMT Set Screw Connector	50
TC723A-FA	1" Red Insulated Steel EMT Set Screw Connector	25
TK121A-FA	½" Red Steel EMT Set Screw Coupling	50
TK122A-FA	¾" Red Steel EMT Set Screw Coupling	50
TK123A-FA	1" Red Steel EMT Set Screw Coupling	25

- 4" square welded box, 1½" or 2⅛" deep
- Pre-installed 10½" insulated grounding pigtail
- One- or two-device cover, raised ½", ⅝", or ¾"
- 12" (SSF-SV12) or 18" (SSF-SV18) vertical mounting bracket
- Save on labor costs by eliminating multiple installation steps

151-SV12-1458

151-SV18-1458

Box With Pre-Installed 10½" Pigtail, Raised Cover, and Vertical Mounting Bracket

Cat. No.	Box Type Included	Box Depth	Pigtail Included	Box Cover Included	Raised	No. of Devices	Bracket Included	Std. Pkg. Quantity	UPC Number
151-SV12-13	521511234EW	1½"	10½"	52-C-13	½"	1	SSF-SV12	10	78599102601
151-SV12-1458	521511234EW	1½"	10½"	52-C-14-5/8	⅝"	1	SSF-SV12	10	78599102602
151-SV12-14	521511234EW	1½"	10½"	52-C-14	¾"	1	SSF-SV12	10	78599102752
151-SV12-17	521511234EW	1½"	10½"	52-C-17-25	½"	2	SSF-SV12	10	78599102754
151-SV12-1858	521511234EW	1½"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SV12	10	78599102756
151-SV12-18	521511234EW	1½"	10½"	52-C-18	¾"	2	SSF-SV12	10	78599102604
171-SV12-13	521711234E	2⅛"	10½"	52-C-13	½"	1	SSF-SV12	10	78599102589
171-SV12-1458	521711234E	2⅛"	10½"	52-C-14-5/8	⅝"	1	SSF-SV12	10	78599102591
171-SV12-14	521711234E	2⅛"	10½"	52-C-14	¾"	1	SSF-SV12	10	78599102590
171-SV12-17	521711234E	2⅛"	10½"	52-C-17-25	½"	2	SSF-SV12	10	78599102770
171-SV12-1858	521711234E	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SV12	10	78599102774
171-SV12-18	521711234E	2⅛"	10½"	52-C-18	¾"	2	SSF-SV12	10	78599102772
151-SV18-13	521511234EW	1½"	10½"	52-C-13	½"	1	SSF-SV18	10	78599102606
151-SV18-1458	521511234EW	1½"	10½"	52-C-14-5/8	⅝"	1	SSF-SV18	10	78599102607
151-SV18-14	521511234EW	1½"	10½"	52-C-14	¾"	1	SSF-SV18	10	78599102758
151-SV18-17	521511234EW	1½"	10½"	52-C-17-25	½"	2	SSF-SV18	10	78599102760
151-SV18-1858	521511234EW	1½"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SV18	10	78599102762
151-SV18-18	521511234EW	1½"	10½"	52-C-18	¾"	2	SSF-SV18	10	78599102609
171-SV18-13	521711234E	2⅛"	10½"	52-C-13	½"	1	SSF-SV18	10	78599102593
171-SV18-1458	521711234E	2⅛"	10½"	52-C-14-5/8	⅝"	1	SSF-SV18	10	78599102595
171-SV18-14	521711234E	2⅛"	10½"	52-C-14	¾"	1	SSF-SV18	10	78599102594
171-SV18-17	521711234E	2⅛"	10½"	52-C-17-25	½"	2	SSF-SV18	10	78599102776
171-SV18-1858	521711234E	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SV18	10	78599102780
171-SV18-18	521711234E	2⅛"	10½"	52-C-18	¾"	2	SSF-SV18	10	78599102778

- Built-in cable support secures cable 6" above the box, satisfying NEC® code requirements
- Flexible design accommodates both 4" and 4 11/16" boxes
- Key-hole box mounting slots maintain box position if mud ring needs to be removed
- Pre-installed 10½" insulated grounding pigtails
- One- or two-device cover, raised ½", ⅝", or ¾"
- Save on labor costs by eliminating multiple installation steps

SSF-SH2346-CS

Box-to-Stud Mounting Bracket With Far-Side and Cable Support

Cat. No.	Box Type Included	Box Depth	Pigtail Included	Box Cover Included	Raised	No. of Devices	Bracket Included	Std. Pkg. Quantity	UPC Number
151-SH2346-13-CS	521511234EW	1½"	10½"	52-C-13	½"	1	SSF-SH2346-CS	10	78599107178
151-SH2346-1458-CS	521511234EW	1½"	10½"	52-C-14-5/8	⅝"	1	SSF-SH2346-CS	10	78599107179
151-SH2346-14-CS	521511234EW	1½"	10½"	52-C-14	¾"	1	SSF-SH2346-CS	10	78599107180
151-SH2346-17-CS	521511234EW	1½"	10½"	52-C-17-25	½"	2	SSF-SH2346-CS	10	78599107181
151-SH2346-1858-CS	521511234EW	1½"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SH2346-CS	10	78599107182
151-SH2346-18-CS	521511234EW	1½"	10½"	52-C-18	¾"	2	SSF-SH2346-CS	10	78599107183
171-SH2346-13-CS	521711234E	2⅛"	10½"	52-C-13	½"	1	SSF-SH2346-CS	10	78599107184
171-SH2346-1458-CS	521711234E	2⅛"	10½"	52-C-14-5/8	⅝"	1	SSF-SH2346-CS	10	78599107186
171-SH2346-14-CS	521711234E	2⅛"	10½"	52-C-14	¾"	1	SSF-SH2346-CS	10	78599107187
171-SH2346-17-CS	521711234E	2⅛"	10½"	52-C-17-25	½"	2	SSF-SH2346-CS	10	78599107188
171-SH2346-1858-CS	521711234E	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SH2346-CS	10	78599107189
171-SH2346-18-CS	521711234E	2⅛"	10½"	52-C-18	¾"	2	SSF-SH2346-CS	10	78599107191

- 4" square welded box, 1½" or 2⅛" deep
- Pre-installed 10½" insulated grounding pigtail
- One- or two-device cover, raised ½", ⅝", or ¾"
- SSF-SH2346 box-to-stud mounting bracket
- Save on labor costs by eliminating multiple installation steps

171-SH2346-1458

151-SH2346-13

Box With Pre-Installed 10½" Pigtail, Raised Cover, and Box-to-Stud Bracket

Cat. No.	Box Type Included	Box Depth	Pigtail Included	Box Cover Included	Raised	No. of Devices	Bracket Included	Std. Pkg. Quantity	UPC Number
***151-SH2346-13**	521511234EW	1½"	10½"	52-C-13	½"	1	SSF-SH2346	10	78599102611
***151-SH2346-1458**	521511234EW	1½"	10½"	52-C-14-5/8	⅝"	1	SSF-SH2346	10	78599102612
***151-SH2346-14**	521511234EW	1½"	10½"	52-C-14	¾"	1	SSF-SH2346	10	78599102746
***151-SH2346-17**	521511234EW	1½"	10½"	52-C-17-25	½"	2	SSF-SH2346	10	78599102748
***151-SH2346-1858**	521511234EW	1½"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SH2346	10	78599102810
***151-SH2346-18**	521511234EW	1½"	10½"	52-C-18	¾"	2	SSF-SH2346	10	78599102614
171-SH2346-13	521711234E	2⅛"	10½"	52-C-13	½"	1	SSF-SH2346	10	8599102597
171-SH2346-1458	521711234E	2⅛"	10½"	52-C-14-5/8	⅝"	1	SSF-SH2346	10	78599102599
171-SH2346-14	521711234E	2⅛"	10½"	52-C-14	¾"	1	SSF-SH2346	10	78599102598
171-SH2346-17	521711234E	2⅛"	10½"	52-C-17-25	½"	2	SSF-SH2346	10	78599102764
171-SH2346-1858	521711234E	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	SSF-SH2346	10	78599102812
171-SH2346-18	521711234E	2⅛"	10½"	52-C-18	¾"	2	SSF-SH2346	10	78599102766

*** ¾" K/O not usable in shallow box.**

- 4" square welded box, 1½" or 2⅛" deep
- Pre-installed 10½" insulated grounding pigtail
- Box support cover combines box-to-stud mounting bracket with device cover
- One- or two-device box support cover, raised ½", ⅝", or ¾"
- Save on labor costs by eliminating multiple installation steps

52171-CM14-5/8

52171-CM14-5/8
mounted to stud

Box With Pre-Installed 10½" Pigtail and Box Support Cover

Cat. No.	Box Type Included	Box Depth	Pigtail Included	Box Cover Included	Raised	No. of Devices	Std. Pkg. Quantity	UPC Number
52151-CM13	521511234EW	1½"	10½"	52CM13	½"	1	25	78599102712
52151-CM14-5/8	521511234EW	1½"	10½"	52CM14-5/8	⅝"	1	25	78599102714
52151-CM14	521511234EW	1½"	10½"	52CM14	¾"	1	25	78599102716
52151-CMD17	521511234EW	1½"	10½"	52CMD17	½"	2	25	78599102718
52151-CMD18-5/8	521511234EW	1½"	10½"	52CMD18-5/8	⅝"	2	25	78599102720
52151-CMD18	521511234EW	1½"	10½"	52CMD18	¾"	2	25	78599102722
52171-CM13	521711234E	2⅛"	10½"	52CM13	½"	1	25	78599102700
52171-CM14-5/8	521711234E	2⅛"	10½"	52CM14-5/8	⅝"	1	25	78599102702
52171-CM14	521711234E	2⅛"	10½"	52CM14	¾"	1	25	78599102704
52171-CMD17	521711234E	2⅛"	10½"	52CMD17	½"	2	25	78599102706
52171-CMD18-5/8	521711234E	2⅛"	10½"	52CMD18-5/8	⅝"	2	25	78599102708
52171-CMD18	521711234E	2⅛"	10½"	52CMD18	¾"	2	25	78599102710

- 4" square and 4 11/16" square boxes
- 1½" deep or 2⅛" deep
- Pre-installed 10½" insulated grounding pigtail
- Available with conduit KOs or clamps for flexible/armored/MC cable
- Save on labor costs by eliminating multiple installation steps

171-MSX-14

MS Series Pre-Assemblies

Cat. No.	Box Type Included	Box Depth	Pigtail Included	Box Cover Included	Raised	No. of Devices	Std. Ctn.
151-MS-13	52151-MS-1/2 3/4	1½"	10½"	52-C-13	½"	1	25
151-MS-14	52151-MS-1/2 3/4	1½"	10½"	52-C-14	¾"	1	25
151-MS-1458	52151-MS-1/2 3/4	1½"	10½"	52-C-14-5/8	⅝"	1	25
171MS13	52171-MS-1/2 3/4	2⅛"	10½"	52-C-13	½"	1	25
171-MS-14	52171-MS-1/2 3/4	2⅛"	10½"	52-C-14	¾"	1	25
171-MS-1458	52171-MS-1/2 3/4	2⅛"	10½"	52-C-14-5/8	⅝"	1	25
171MS18	52171-MS-1/2 3/4	2⅛"	10½"	52-C-18	¾"	2	25
171-MS-18 5/8	52171-MS-1/2 3/4	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	25
171MSX13	52171-MSX	2⅛"	10½"	52-C-13	½"	1	25
171-MSX-14	52171-MSX	2⅛"	10½"	52-C-14	¾"	1	25
171-MSX-1458	52171-MSX	2⅛"	10½"	52-C-14-5/8	⅝"	1	25
171MSX18	52171-MSX	2⅛"	10½"	52-C-18	¾"	2	25
171-MSX-18 5/8	52171-MSX	2⅛"	10½"	52-C-18-5/8-25	⅝"	2	25
72171MS14	72171-MS-1/2 3/4	2⅛"	10½"	72-C-14	¾"	1	25
72171-MS-1458	72171-MS-1/2 3/4	2⅛"	10½"	72-C-14-5/8	⅝"	1	25
72171MS18	72171-MS-1/2 3/4	2⅛"	10½"	72-C-18	¾"	2	25
72171-MS-18 5/8	72171-MS-1/2 3/4	2⅛"	10½"	72-C-18-5/8	⅝"	2	25
72171MSX14	72171-MS-1/2 3/4	2⅛"	10½"	72-C-14	¾"	1	25
72171-MSX-1458	72171-MSX	2⅛"	10½"	72-C-14-5/8	⅝"	1	25
72171MSX18	72171-MS-1/2 3/4	2⅛"	10½"	72-C-18	¾"	2	25
72171-MSX-1858	72171-MS-1/2 3/4	2⅛"	10½"	72-C-18-5/8	⅝"	2	25

- Popular 4" square boxes and switch boxes
- Pre-installed 10½" insulated grounding pigtails
- Save on labor costs by eliminating multiple installation steps

521711234EP

Box With Pre-Installed 10½" Pigtail

Cat. No.	Box Type Included	Knockouts	Pre-Installed Pigtail	Std. Pkg. Quantity	UPC Number
521511234EWP	52151234EW 4"-sq. x 1½"D Welded Box	Eccentric	10½"	50	78599102588
521511234P	521511234 4"-sq. x 1½"D Drawn Box	½" & ¾"	10½"	50	78599102586
521711234EP	521711234E 4"-sq. x 2⅛"D Welded Box	½" & ¾" Eccentric	10½"	50	78599102587
52151XP	52151X 4"-sq. x 1½"D Welded Box	½" & ¾" Eccentric	10½"	50	78599102724
52151CVNP	52151CVN 4"-sq. x 1½"D Welded Box	½" & ¾" Eccentric	10½"	25	78599102728
LXW0WP	LXWOW-25 3"H x 2"W x 2½"D Gangable Switch Box	½"	10½"	25	78599102959
LXVP	LXV-25 3"H x 2"W x 2½"D Gangable Switch Box	½"	10½"	25	78599102692
CXW0WP	CXWOW 3"H x 2"W x 3½"D Gangable Switch Box	½" & ¾"	10½"	25	78599102694
CXWVP	CXWV 3"H x 2"W x 3½"D Gangable Switch Box	½" & ¾"	10½"	25	78599102696
CXP	CX 3"H x 2"W x 3½"D Gangable Switch Box	½" & ¾"	10½"	25	78599102698

Visit our website for more information about Thomas & Betts solutions and our newest products. For a user-friendly catalog and competitive part-number search, application and technical support, and other useful information, go to .

All Thomas & Betts products for use in commercial and institutional facilities meet or exceed applicable industry specifications or codes, which are detailed in the appropriate T&B product literature.

Thomas & Betts offers free download of two- and three-dimensional CAD models of many of its products in more than 90 native CAD formats at .

American Recovery and Reinvestment Act (ARRA)

Get certification for compliant products online at .

Thomas & Betts Corporation
Electrical Division
Headquarters
8155 T&B Boulevard
Memphis, TN 38125
Phone: 901.252.5000
Fax: 901.252.1354
Technical Services:
888.862.3289
Customer Service:
1.800.816.7809
elec_custserv@tnb.com

Thomas & Betts Ltd
700 Thomas Avenue
Saint-Jean-sur-Richelieu, Quebec
J2X 2M9
Phone: 450.347.5318
Fax: 450.347.1976
mrkt.canada@tnb.com

Thomas & Betts Europe Centre
200 Chaussee de Waterloo
B-1640 Rhode-St-Genese
Belgium
Phone: +32.235.98200
europe_inquiry@tnb.com

Thomas & Betts Adia Pte Ltd
10 Ang Mo Kio
Street 65
#06-07 Techpoint
Singapore 569059
Phone: +65.6720.8828
Fax: +65.6720.8780
asia_inquiry@tnb.com

Thomas & Betts Australasia Pty Ltd
Unit D3, Lidcombe Business Park
3-29 Birnie Avenue
Lidcombe NSW 2141 Australia
Phone: +61 2 8754 2700
Fax: +61 2 8754 2735

8155 T&B Boulevard
Memphis, TN 38125
Phone: 901.252.5000

www.tnb.com

A Member of the ABB Group

© 2013 Thomas & Betts Corporation. All rights reserved. NEC and National Electric Code are trademarks of the National Fire Protection Association, Inc. 3/13/6.2M GM-7194