

93-172 PROFESSIONAL

Digital Light Meter

Easy, accurate light measurement.

For evaluating and confirming lighting performance in any commercial environment, there's no easier way than this highly accurate Greenlee digital light meter. A broad measurement range delivers versatility for any application need.

93-172/UPC No. 06060; 93-172-C*/UPC No. 07084*


*Includes Certificate of Calibration

Features

- Measures incandescent, fluorescent, metal halide, high-pressure sodium, and halogen lamp output.
- Color- and cosine-corrected for enhanced accuracy.
- Measures up to 50,000 lux.

Accessories included

- (1) 9V battery
- Protective case

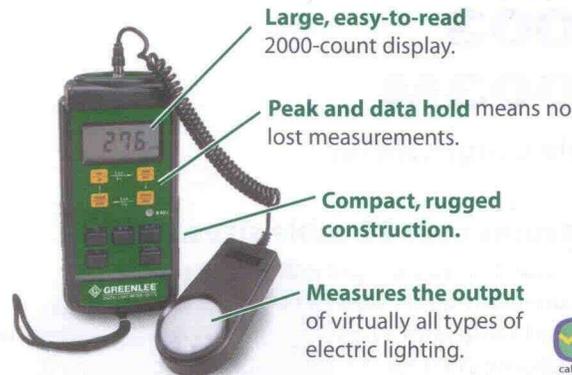

Specifications

Ranges	
Foot candles	0.01-5,000Fc (20/200/2,000/5,000)
Lux	0.1-50,000 lux (200/2,000, 20,000/50,000)
Accuracy	
Incandescent light source	± 4%
Other light sources	± 7%
Temperature range	32° F to 104° F (0° C to 40° C)
Sampling rate	2.5 times per second

LT-100

Lamp Tester

Quickly tests a wide range of lamps and lamp components.

This professional tester tests fluorescent lamp ballasts, starters, resistors, and most lamps, including fluorescent, low-pressure sodium, high-pressure sodium, neon, mercury, and metal halide.

LT-100/UPC No. 07541

Accessories included

Carrying case



Specifications

Live conductor indication	60-250VAC, 40-60Hz
Continuity verification	0-5MΩ (test current: <7μA)
Lamp tester voltage	3kV/160kHz (test current: <200μA)
Overvoltage protection	IEC 61010-1, Category II, 250V

5715

Gas Lamp Tester


Quickly tests a wide range of lamps.

Tests most fluorescent lamps (except energy-saving), low-pressure sodium, high-pressure sodium, neon, mercury, and metal halide. Also checks starters, resistors, ignitors, capacitors, photo cells, and nonelectronic ballasts.

5715/UPC No. 34529

Accessories included

- | | |
|--------------------|---------|
| (2) 9V batteries | Probes |
| Detachable antenna | Clamps |
| Leads | Holster |

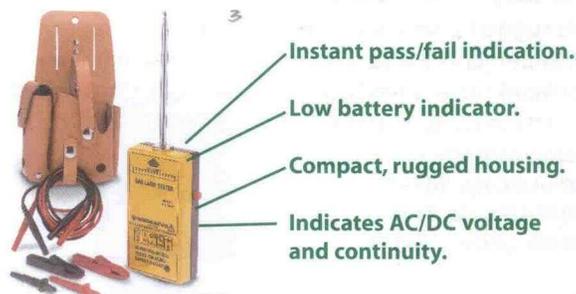

Specifications

Capacity	Voltage up to 500 V AC/DC; Continuity to 300kΩ
Size	6" x 2-3/4" x 1-3/4" (152mm x 70mm x 45mm)
Antenna	27" (686mm)
Weight	2.4 lbs. (1kg)