

Straight Blade Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
HBL® Extra Heavy Duty Specification  
Grade Duplex Receptacle

HUBBELL

Features

- Weather-resistance complies with national electrical code requirements
- Finder Groove Face
- One-piece brass integral ground strap
- Deep body design with circuit ID face

Ordering Information

Description	Device Color	UPC	Catalog Number
Weather-Resistant, back and side wired	Gray	783585320571	HBL5362GYWR

Listings


UL Listed to UL498 File No. E2186  
Certified to CSA 22.2, No. 42 File 285  
Fed. Spec. WC596  
NEMA® WD-6 Compliant

Specifications

Face	Nylon
Base	PBT
By-Pass Power Contacts	.036" (.9) Brass
Clamp	Brass
Terminal Screws	Brass
Contacts	0.031" (0.8) Brass
Automatic Self-grounding Clip	Stainless steel
Mounting Screws	Stainless Steel

Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#12-#10 AWG stranded or solid copper wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
<b>Environmental</b>	
Flammability	Top: UL 94V-2, Base: UL 94V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

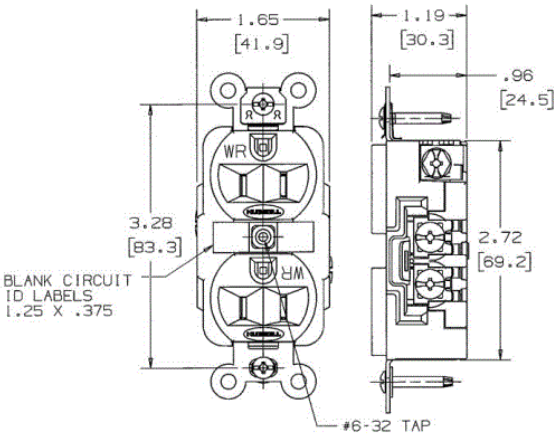

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing  
eCatalog

