

Overhead 4-Post Rack Systems

SPECIFICATIONS

The Overhead 4-Post Rack System shall be 6 RU, constructed of steel and capable of accepting 19" wide EIA equipment. The equipment mounting rails shall have tapped #12-24 style mounting and shall have rack unit markings. The rack shall be front to back adjustable to accommodate a variety of equipment depths. Vertical cable managers and side panels will be available. The unit will mount to strut type structural steel suspended on threaded rod from the ceiling and be compatible with Wyr-Grid[®] Overhead Pathways Waterfalls and Brackets. The construction method shall support up to 150 lbs. of equipment, cabling and ensure an electrically bonded structure for ease of grounding.



TECHNICAL INFORMATION

<i>Dimension:</i>	<i>Part Number</i>	<i>RU</i>	<i>Height in. (mm)</i>	<i>Width in. (mm)</i>	<i>Depth in. (mm)</i>
	PZLRB4P6	6	11.8 (300)	11.8 (300)	30.0 (762)
<i>Packaging:</i>	Package includes 4-Post Rack, assembly hardware and installation instructions				
<i>Standards:</i>	UL2416 listed to 150 lbs.				

KEY FEATURES AND BENEFITS

<i>Mounts switch equipment above racks or cabinet:</i>	Allows maximum utilization of available rack or cabinet space in a top of rack switching configuration
<i>Pathway compatible:</i>	Designed for use with Wyr-Grid Overhead Pathway and will work with basket tray or ladder rack
<i>Narrow width:</i>	Rack will fit over a 600mm wide cabinet
<i>Adjustable depth:</i>	Adjust from 18 in. (457mm) to 30 in. (762mm) deep to accommodate various equipment depths
<i>Vertical managers with covers:</i>	Manage cabling, from overhead rack, down into rack or cabinet
<i>Secure mounting:</i>	Mounts on strut supported with threaded rod to the ceiling

APPLICATIONS

Overhead 4-Post Racks are designed to be an effective overhead switching and patching solution for the data center. Available in 6 RU, maximum equipment utilization by placing server row switching and patching above the racks or cabinets. Multiple overhead racks can be mounted next to each other over a lineup of racks or cabinets and enables a "rack and roll" server configuration. The rack can be used to manage high performance copper and fiber patch cables. Vertical cable managers can be added for better cable control and organization. End panels can be added for increased aesthetics. This modular rack system is compatible with Panduit horizontal cable managers. This Overhead 4-Post Rack System is part of a complete rack and cable management system that manages, protects, and showcases your network investment.

Overhead 4-Post Rack System

6 RU Rack Bracket: [PZLRB4P6](#)

Vertical Managers

6 RU Set of (2) 2.5 in. x 4.5 in. (64mm x 114mm): [PZLRB4P6LR](#)

Accessories

Bend radius post 4.0 in. (102mm): [PZBR4](#)

1 RU horizontal ring manager 19" EIA: [CMPHF1](#)

1 RU horizontal manager cover: [CMPH1C](#)


2 RU horizontal ring manager 19" EIA: [CMPHF2](#)

2 RU horizontal manager cover: [CMPH2C](#)

Overhead 4-Post Rack Systems

Illustrated below is an example of the overhead distribution rack mounting flexibility.
See product installation instructions for full list of mounting configurations.

WYR-GRID® OVERHEAD CABLE TRAY MOUNTING APPLICATION

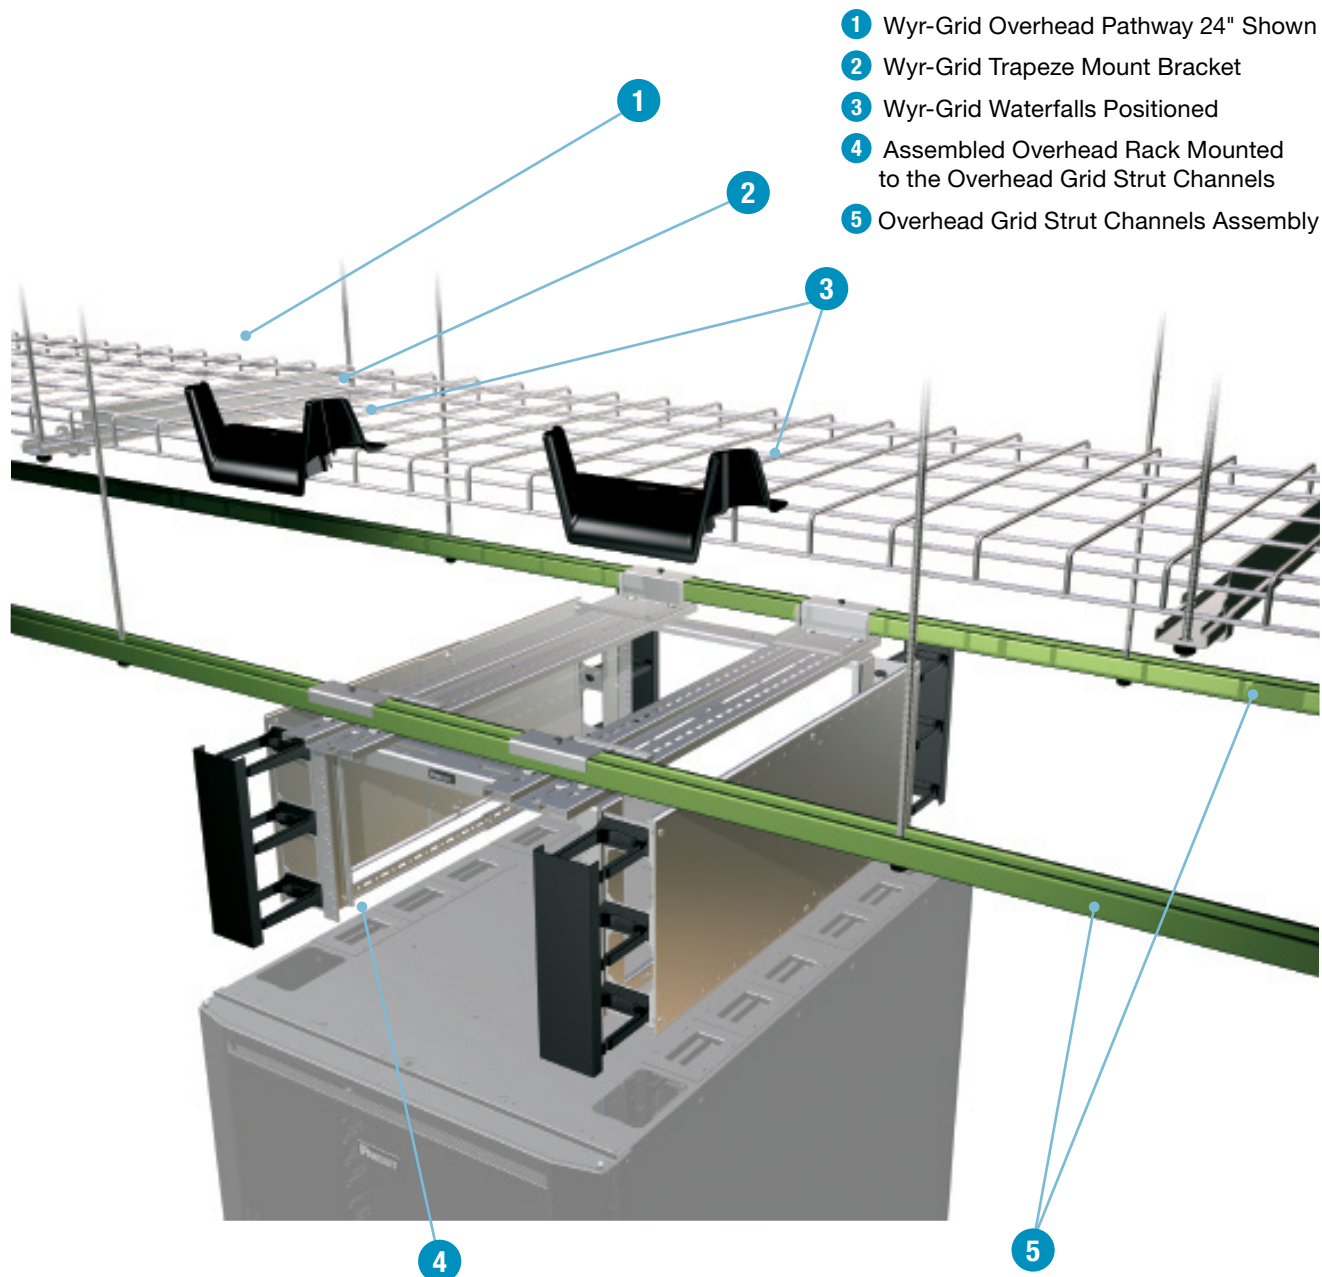

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2024 Panduit Corp.
ALL RIGHTS RESERVED.
RKSP184-WW-ENG
2/2024