


## Stripmaster® and Stripmaster® Lite Wire Strippers

- One-step stripping enhances productivity
- Spring-action motion increases leverage and reduces operator fatigue
- Precision-ground, knife-type blades provide clean, accurate stripping
- Sturdy die cast frame provides long-term durability
- Wire gripper holds wire securely in position
- Stripmaster® Lite designed for smaller hands — 3/4 the size of the standard Stripmaster®

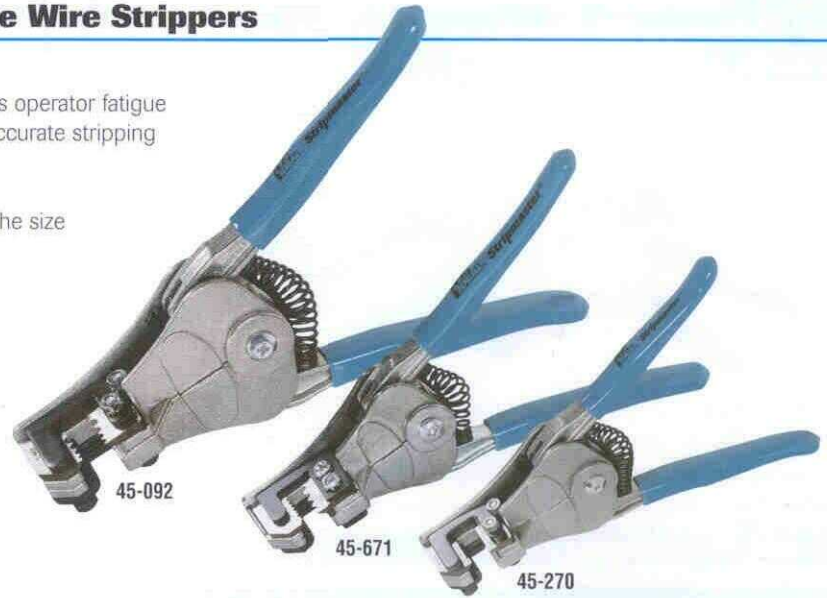

### Stripmaster® Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (Inches)												Cat. No.	Replacement Blades (Pair) Cat. No.
Wire Size AWG													
8	10	12	14	16	18	20	22	24	26	28	30		
.159	.141	.106										45-090 or 45-290	L-4419
	.144	.105	.085	.073	.073							45-091	L-4420
	.144	.113	.090	.072	.061	.048	.048					45-092 or 45-292	L-4421
			.090	.072	.061		.039	.039				45-093	L-4422
				.072	.061		.048	.039	.032	.026		45-097	L-4994
						.048	.039	.032	.026	.021	.016	45-098	L-5361
.198	.167			.062	.055							45-099	L-8763

Tolerances A.001 -.005

### Stripmaster® Lite Wire Strippers and Knife-Type Blades

Specifications — Stripping Hole Diameter (Inches)													Cat. No.	Replacement Blades (Pair) Cat. No.
Wire Size AWG														
12	14	16	18	20	22	24	26	28	30	16/18	20/22	Cutting Edge		
		.072	.061	.048	.039								45-671	LB-1001
						.032	.026	.021	.016				45-672	LB-1002
.113	.090	.072	.061 (All stranded wire)										45-673	LB-1003
.096	.085	.073	.061 (12 & 14 Solid wire, 16 & 18 Stranded wire)										45-674	LB-1004
										.072	.048	.250 Wide	45-675	LB-1005

Tolerances A.001 -.005

### Coax Stripmaster® Wire Strippers and Blades

Coax Cable Type (RGU)	Cat. No.	Replacement Blades (Pair) Cat. No.
RG-6	45-262	LB-740
RG-58	45-264	LB-742
RG-59	45-265	LB-743
RG-62	45-266	LB-744

Optional Accessories	Cat. No.
Transparent Adjustable Wire Stop (for Stripmaster® Wire Strippers)	L-5270
Transparent Adjustable Wire Stop (for Stripmaster® Lite Wire Strippers)	LB-1195
Stripmaster® Lite Premium Leather Pouch	35-951

### Stripmaster® Wire Strippers with Rectangular Holes

Description	Cat. No.	Replacement Blades (Pair) Cat. No.
For Flat Telephone Cable (.60 in. or 1.52mm)	45-270	LB-1155
For European Flat Lamp Cord	45-089	L-8762
For SP-SPT Lamp Cord	45-095*	L-4452

\*Also strips 2- and 3-conductor low-voltage wire used in G.E. and Touchplate remote control wiring system

**For Complete IDEAL Wire Stripper Product Line — See IDEAL Electrical Products Catalog**