

Optanium T8 Programmed Start

OPTANIUM ELE BALLAST (2) F32T8 120-277V

Philips Advance Optanium high-efficiency electronic ballasts are engineered to optimize lighting performance and maximize energy savings. These ballasts provide an unparalleled package of features and benefits to support the wide variety of T8 fluorescent lamps out in the market place.

Product data


General Information		Input Power (Nom) 56-55 W	
Lamp Type	F32T8	Rated Lamp Watts	32 W
Number of Lamps	1/2 piece/unit		
Ballast Type	Electronic Fluorescent	Wiring	
Base Model	IOP2PSP32N	Color Input Terminals	No terminals
Suitable For Outdoor Use	Yes	Color Output Terminals	No terminals
Automatic Restart	Yes	Wire Striplength	0.50/0.375 mm
		Lamp Connection	Parallel
Operating and Electrical		Wire Length By Color	See data sheet
Input Voltage	120 to 277 V	Wire Gauge (Nom)	18AWG mm
Input Frequency	50 to 60 Hz	Wire Type	Solid
Max THD	10 %	Remote Wiring Configuration Allowed	Yes
Starting Method	Programmed Start	Tandem Wiring Configuration Allowed	Yes
Lamp Current Crest Factor (Nom)	1.6	Through Wiring Configuration Allowed	Yes
Ignition Time (Nom)	1.5 s	Max Ballast-Lamp Distance Remote Wiring	ES = 6' / Standard = 20'
Ballast Factor (Nom)	0.89	Max Ballast-Lamp Distance Tandem Wiring	ES = 6' / Standard = 20'
Power Factor (Nom)	0.98	Max Ballast-Lamp Distance Through Wiring	ES = 6' / Standard = 20'
Input Current (Operating) (Max)	0.20 A	Connector Type	No connector
Input Current (Operating) (Min)	0.47 A		

Optanium T8 Programmed Start

Temperature	
T-Case Maximum (Nom)	70 °C
Mechanical and Housing	
Housing Material	Metal
Housing	N
Housing Dimensions	9.5" x 1.3" x 1.0"
Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Approbation Marks	CSA certificate UL certificate CEC Listing CEE Rated NEMA Premium RoHS Compliant
Sound Rating	A

UL Recognized	No
Product Data	
Order product name	OPTANIUM IOP2PSP32N35I
EAN/UPC - Product	781087134733
Order code	IOP2PSP32N35I
Local order code	503235
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913701260601
Net Weight (Piece)	350.000 g

Dimensional drawing

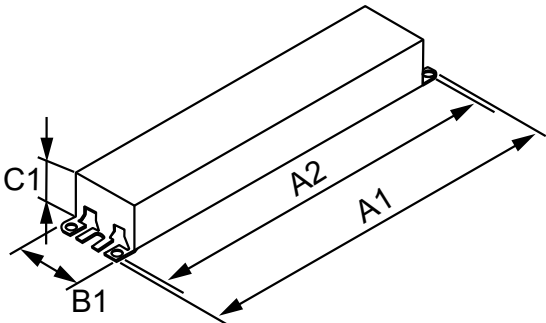

ELE BALLAST (2) F32T8 120-277V

Product	A1	A2	B1	C1
---------	----	----	----	----

