

Xcelerator
Jack s
Xcelerator US O C Jack

- Featu res
- RJ-25 USOC (RJ-25) Jack
 - Exclusive 1-Punch Termination Reduces Termination Time by 75%
 - Mating Cycles Exceed Industry Standard by Four Times
 - Bulk Packaging Reduces Excess Waste on the Job

Ord ering I nf or mation

Description	Color	UPC Nu m b er	Catalog No.
Xcelerator USOC Jack	White	662620824673	HXJUW

Listings

6-Position USOC Compliant
Mechanical TIA-568-C.2
UL Listed 1863
CSA Certified
RoHS Compliant

Specif ications

Nose Contact	Beryllium copper with precious metal plating over nickel under plating
IDC Contact	Phosphor bronze with 100 micro-inch tin lead 60/40 plating over nickel under plating
Housing	High impact thermoplastic (UL 94 V-0)

Perf or mance



Electrical
6-Position USOC Compliant

Mechanical
Contact performance confirmed over the full range of ISO/FCC compliant plug
IDC Contact Termination: 10x
Keystone Latching Force: 25 lbs.
Nose Contact Mating Cycles: 2000

Applications

Phone
DSL

HUBBELL

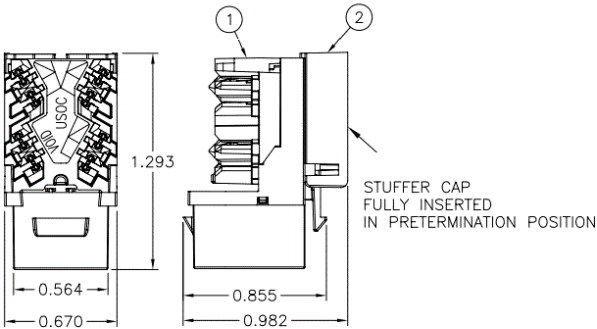

Complementary Prod u cts

1-Punch Tool	TX4P
Dust Cover	HXJDC25
Termination Puck	HXTP25

Online Resources

eCatalog